

SANYPALFINGER CRANE SERIES



OVERVIEW CONTENTS

SPS MODELS

Model Lines and Optional Features	03 - 04
SPS Diagrams	05
Features & Options	06
SPS 8.000	08
SPS 12500	09
SPS 12500 PRO	10
SPS 16000	11
SPS 17500	12
SPS 20000	13
SPS 20000 PRO-SC	14
SPS 25000	15
SPS 30000	16
SPS 30000 PRO-SC	17
SPS 30000 PRO-DC	18
SPS 35000	19
SPS 35000 PRO-DC	20
SPS 40000	21
SPS 40000 PRO-DC	22
SPS 45000	23
SPS 45000 PRO-DC	24
SPS 50000	25

SPK MODELS

Model Lines and Optional Features	26-27
SPK Diagrams	28
Features & Options	29
SPK 6500	30-31
SPK 8500	32-33
SPK 10000	34-35
SPK 12500	36-37
SPK 15500	38-39
SPK 18500	40-41
SPK 23500	42-43
SPK 32080	44-45
SPK 36080	46-47
SPK 38502	48-49
SPK 42502	50-51
SPK 55502	52-53
SPK 56002	54-55
SPK 60002	56-57
SPK 61502	58-59
SPK 70002	60-61
SPK 74002	62-63

Notes

Notes	64
-------	----

MODEL LINES AND OPTIONAL FEATURES

	Rated lifting moment [mt]	Rated lifting capacity [kg]	Max. outreach [m]	Max. lines of hook	Slewing angle [°]	Boom Raising Angle	Max. Lifting Height [m]	Length of the boom system [Retracted]	Length of the boom system [Fully Extended]	Boom Sections	Outrigger Span [Fully Extended]	Recommended flow rate	Operating Pressure	Recommended oil tank capacity	Crane Weight [kg]
SPS 8.000 SLD	8 mt	3200	10.2 m	4	Continuous	0-75°	12.5 m	3.5 m	10.4 m	4	4400 mm	35 L/min	23 Mpa	30L	1247
SPS 12500 A	12.5 mt	5000	9.0 m	4	Continuous	0-75°	11.4 m	4.2 m	9.3 m	3	5100 mm	35-50 L/min	25 Mpa	100L	2260
SPS 12500 B	12.5 mt	5000	11.6 m	4	Continuous	0-75°	13.9 m	4.3 m	11.9 m	4	5100 mm	35-50 L/min	25 Mpa	100L	2370
SPS 12500 PRO	12.5 mt	5000	9.0 m 11.6 m	4	Continuous	0-75°	11.4 m 13.9 m	4.3 m	9.3 m 11.9 m	3 4	5100 mm	35-50 L/min	25 Mpa	75L	2300 2310
SPS 16000 A	16 mt	7000	9.5 m	4	Continuous	0-75°	11.9 m	4.5 m	9.7 m	3	5300 mm	45-65 L/min	26 Mpa	100L	2450
SPS 16000 B	16 mt	7000	12.3 m	4	Continuous	0-75°	14.6 m	4.7 m	12.5 m	4	5300 mm	45-65 L/min	26 Mpa	100L	2650
SPS 17500 B	19.8 mt	8000	13.5 m	4	Continuous	0-75°	15.9 m	4.8 m	13.8 m	4	5600 mm	45-70 L/min	28 Mpa	100L	2730
SPS 20000 B	20 mt	8000	14.0 m	4	Continuous	0-75°	16.3 m	5.3 m	14.3 m	4	5600 mm	45-70 L/min	31 Mpa	200L	3650 (floor) 3670 (high seat)
SPS 20000 C	20 mt	8000	17.7 m	4	Continuous	0-75°	19.9 m	5.3 m	18.1 m	5	5600 mm	45-70 L/min	31 Mpa	200L	4050 (floor) 4070 (high seat)
SPS 20000 PRO-SC	20 mt	8000	18.3 m	4	Continuous	0-75°	20.6 m	5.5 m	18.7 m	5	7250 mm	45-70 L/min	31 Mpa	200L	4100

MODEL LINES AND OPTIONAL FEATURES

	Rated lifting moment [mt]	Rated lifting capacity [kg]	Max. outreach [m]	Max. lines of hook	Max. Lifting Height [m]	Length of the boom system [Retracted]	Length of the boom system [Fully Extended]	Boom Sections	Outrigger Span [Fully Extended]	Recommended flow rate	Operating Pressure	Recommended oil tank capacity	Crane Weight [kg]
SPS 25000 B	25 mt	10000	14.0 m	6	16.3 m	5.3 m	14.3 m	4	5600 mm	60-90 L/min	31 Mpa	200L	3660 (floor) 3680 (high seat)
SPS 25000 C	25 mt	10000	17.7 m	6	19.9 m	5.3 m	18.1 m	5	5600 mm	60-90 L/min	31 Mpa	200L	4060 (floor) 4080 (high seat)
SPS 30000 B	30 mt	12000	14.5 m	6	16.7 m	5.4 m	14.8 m	4	6000 mm	60-90 L/min	30 Mpa	200L	4180 (floor) 4200 (high seat)
SPS 30000 C	30 mt	12000	18.1 m	6	20.3 m	5.6 m	18.5 m	5	6000 mm	60-90 L/min	30 Mpa	200L	5080 (floor) 5100 (high seat)
SPS 30000 B PRO-SC	30 mt	12000	15.9 m	6	18.2 m	5.75 m	16.2 m	4	6000 mm	60-90 L/min	29 Mpa	200L	4300
SPS 30000 C PRO-DC	30 mt	12000	19.2 m	6	21.3 m	5.6 m	19.5 m	5	7250 mm	60-90 L/min	29 Mpa	200L	5600
SPS 35000 B	35 mt	14000	15.0 m	6	17.4 m	5.5 m	15.4 m	4	6000 mm	60-90 L/min	32 Mpa	200L	4430 (floor) 4450 (high seat)
SPS 35000 C	35 mt	14000	18.1 m	6	20.3 m	5.6 m	18.5 m	5	7250 mm	60-90 L/min	32 Mpa	200L	5530 (floor) 5550 (high seat)
SPS 35000 PRO-DC	35 mt	14000	19.4 m	6	21.6 m	5.9 m	19.8 m	5	7250 mm	60-90 L/min	32 Mpa	200L	5950
SPS 40000 C	40 mt	16000	18.6 m	6	20.7 m	6.05 m	18.95 m	5	7250 mm	80-110 L/min	32 Mpa	300L	5980 (floor) 6000 (high seat)

MODEL LINES AND OPTIONAL FEATURES

	Rated lifting moment [mt]	Rated lifting capacity [kg]	Max. outreach [m]	Max. lines of hook	Slewing angle [°]	Boom Raising Angle	Max. Lifting Height [m]	Length of the boom system [Retracted]	Length of the boom system [Fully Extended]	Boom Sections	Outrigger Span [Fully Extended]	Recommended flow rate	Operating Pressure	Recommended oil tank capacity	Crane Weight [kg]
SPS 40000 PRO-DC	40 mt	16000	22.55 m	6	Continuous	0-75 °	24.5 m	6.6 m	22.9 m	5	8400 mm	80-110 L/min	32 Mpa	300L	6560
SPS 45000 C	45 mt	18000	18.6 m	6	Continuous	0-75 °	20.7 m	6.05 m	18.95 m	5	7250 mm	80-100 L/min	32 Mpa	300L	6100 (floor) 6020 (high seat)
SPS 45000 PRO-DC	45 mt	18000	22.55 m	6	Continuous	0-75 °	24.5 m	6.6 m	22.9 m	5	8400 mm	80-100 L/min	32 Mpa	300L	6760
SPS 50000 C	50 mt	20000	21.2 m	6	Continuous	0-75 °	23.1 m	6.2 m	21.6 m	5	7250 mm	80-110 L/min	32 Mpa	300L	6800



2 - AXLE TRUCKS

SPS 16000



3 - AXLE TRUCKS

SPS 20000



SPS 25000



SPS 30000



4 - AXLE TRUCKS

SPS 35000



SPS 40000



SPS 50000




FEATURES



Proportional Hydraulic System

- Sensitive and stable controls for precise operation
- Operator is able to utilize multiple functions simultaneously

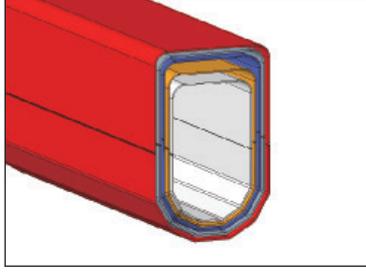

Octagonal Boom Profile

- High strength and rigidity due to octagonal cross section




High Pressure Filter

- Ensures proper functionality and longer lifetime of a crane




High Tensile Steel

- High Tensile Steel: HG785, SC960
- Able to withstand higher forces

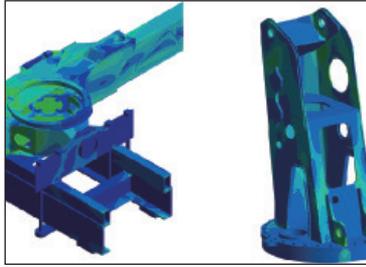

Digitally Design of Machines

- The structure features advanced digital simulation analysis for enhanced safety, reliability, and lightweight design.

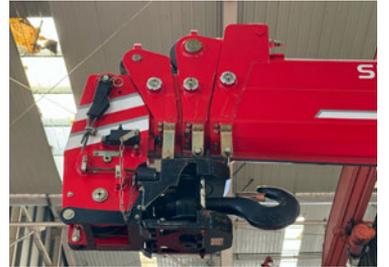

Automatic Hook Retraction

- Automatic hook retraction (standard on all models) stabilizes the hook during transport.
- Protects the wire rope and maximizes cargo space.

OPTIONS



Auxiliary Winch (AXW)



Crane moment limiter (SYMC)



Overwinding stop (OWS)



Sun Protection on the Top seat



Radio remote control system



2 Speed Winch



Service Timer



Load Indicator


SPS 8.000 SLD




TECHNICAL SPECIFICATIONS

	SPS 8.000 A SLD	SPS 8.000 B SLD
No. of Booms	3	4
Lifting Moment	8 mt	8 mt
Lifting Capacity	3200 kg (2.5 m)	3200 kg (2.5 m)
Max. Outreach	8.0 m	10.4 m
Deadweight of the crane	1179 kg	1247 kg

LIFTING CHART

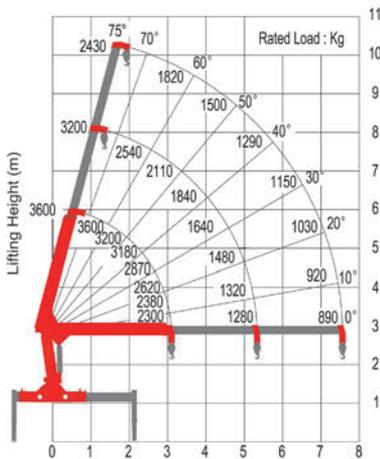

Working Outreach (m)
SPS 8.000 A SLD 1

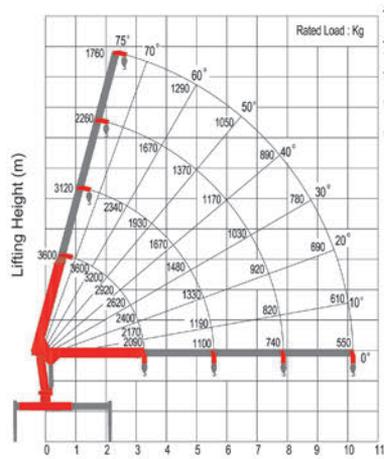

Working Outreach (m)
SPS 8.000 B SLD 1



SPS 12500



TECHNICAL SPECIFICATIONS

	SPS 12500 A	SPS 12500 B
No. of Booms	3	4
Lifting Moment	12.5 mt	12.5 mt
Lifting Capacity	5000 kg (2.5 m)	5000 kg (2.2 m)
Max. Outreach	9.0 m	11.6 m
Deadweight of the crane	2350 kg	2370 kg

LIFTING CHART

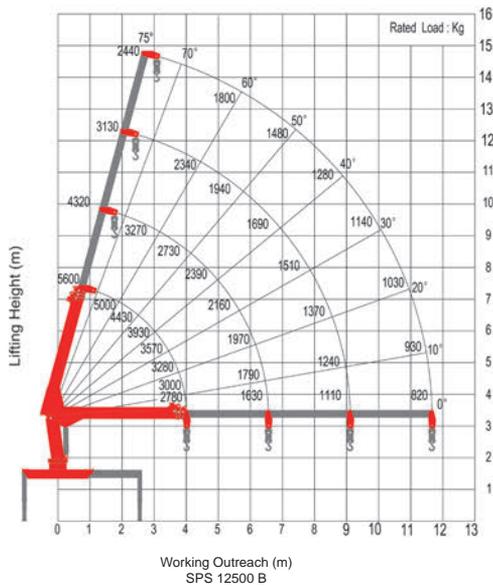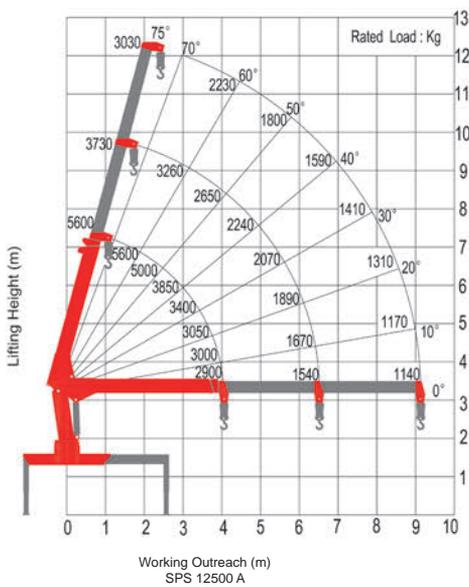



SPS 12500 PRO



TECHNICAL SPECIFICATIONS

	SPS 12500 A PRO	SPS 12500 B PRO
No. of Booms	3	4
Lifting Moment	12.5 mt	12.5 mt
Lifting Capacity	5000 kg (2.5 m)	5000 kg (2.5 m)
Max. Outreach	9 m	11.6 m
Deadweight of the crane	2300 kg	2310 kg

LIFTING CHART

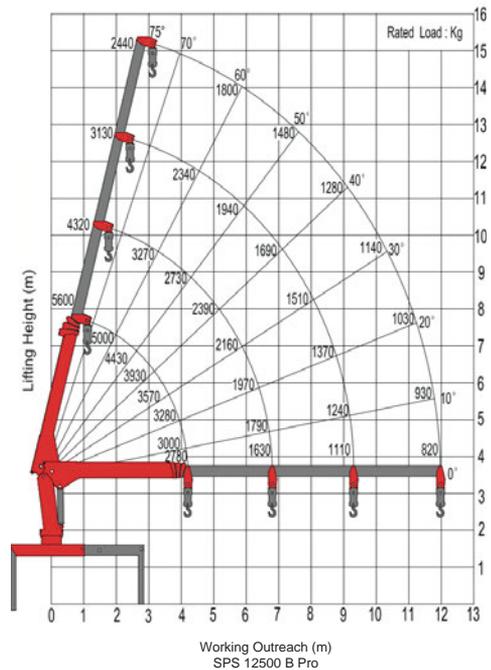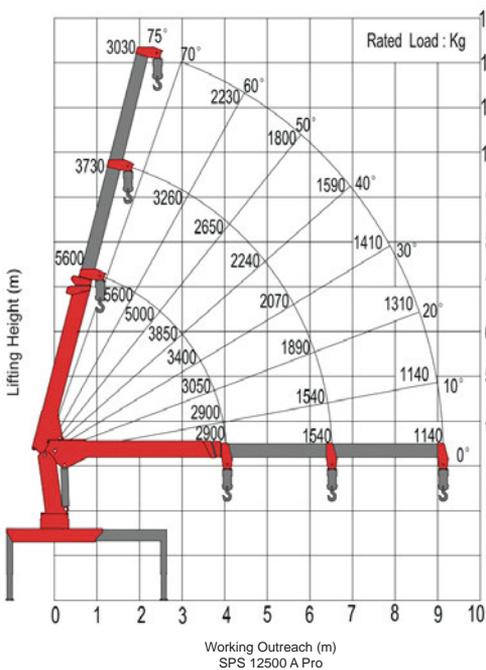



SPS 16000



TECHNICAL SPECIFICATIONS

	SPS 16000 A	SPS 16000 B
No. of Booms	3	4
Lifting Moment	16 mt	16 mt
Lifting Capacity	7000 kg (2.5 m)	7000 kg (2.5 m)
Max. Outreach	9.5 m	12.3 m
Deadweight of the crane	2450 kg	2650 kg

LIFTING CHART

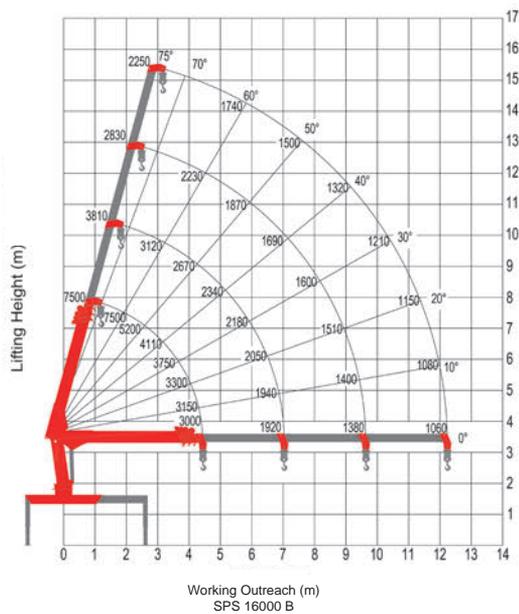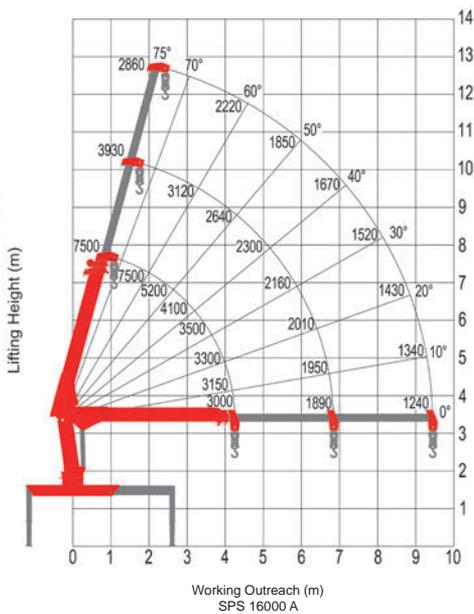


SPS 17500



TECHNICAL SPECIFICATIONS

SPS 17500 B	
No. of Booms	4
Lifting Moment	19.8 mt
Lifting Capacity	8000 kg (2.0 m)
Max. Outreach	13.5 m
Deadweight of the crane	2730 kg

LIFTING CHART

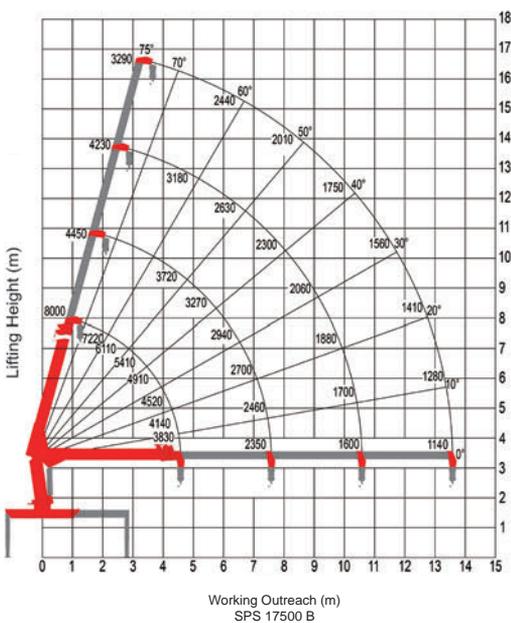



SPS 20000



TECHNICAL SPECIFICATIONS

	SPS 20000 B	SPS 20000 C
No. of Booms	4	5
Lifting Moment	20 mt	20 mt
Lifting Capacity	8000 kg (2.5 m)	8000 kg (2.5 m)
Max. Outreach	14 m	17.7 m
Deadweight of the crane	3650 kg/3670 kg (Floor Control/Top Seat Control)	4050 kg/4070 kg (Floor Control/Top Seat Control)

LIFTING CHART

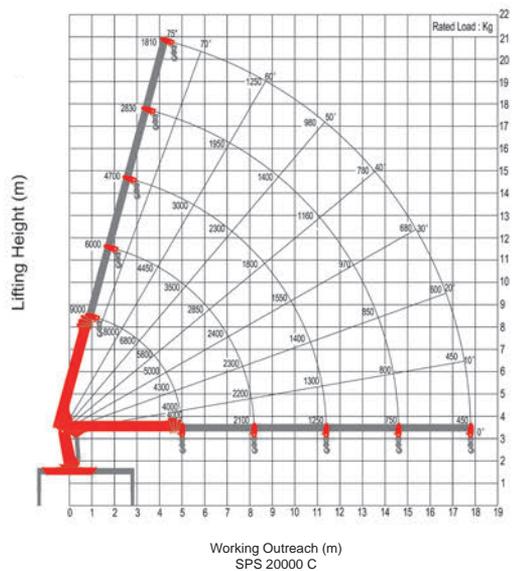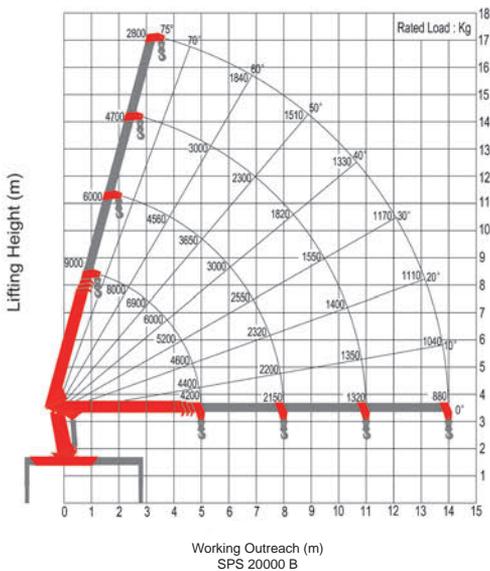


SPS 20000 PRO-SC




TECHNICAL SPECIFICATIONS

	SPS 20000 PRO-SC	SPS 20000 PRO-DC
No. of Booms	5	5
Lifting Moment	20 mt	20 mt
Lifting Capacity	8000 kg (2.5 m)	8000 kg (2.5 m)
Max. Outreach	18.3 m	17.7 m
Deadweight of the crane	4035 kg/4100 kg (Floor Control/Top Seat Control)	4235 kg/4300 kg (Floor Control/Top Seat Control)

LIFTING CHART

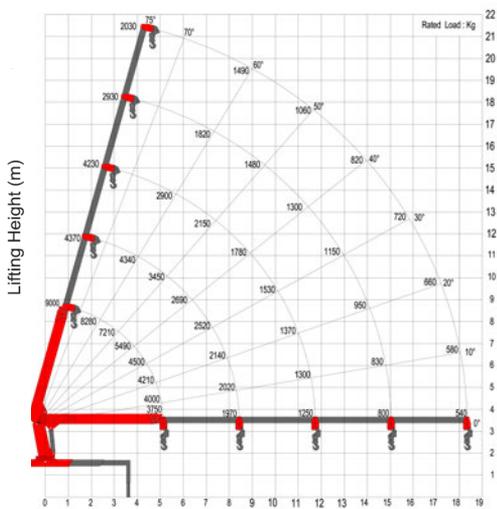

Working Outreach (m)
SPS 20000 C Pro-SC

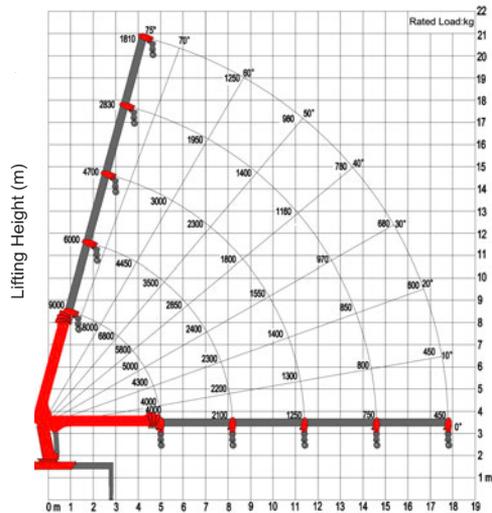

Working Outreach (m)
SPS 20000 C Pro-DC



SPS 25000



TECHNICAL SPECIFICATIONS

	SPS 25000 B	SPS 25000 C
No. of Booms	4	5
Lifting Moment	25 mt	25 mt
Lifting Capacity	10000 kg (2.5 m)	10000 kg (2.5 m)
Max. Outreach	14 m	17.7 m
Deadweight of the crane	3660 kg/3680 kg (Floor Control/Top Seat Control)	4060 kg/4080 kg (Floor Control/Top Seat Control)

LIFTING CHART

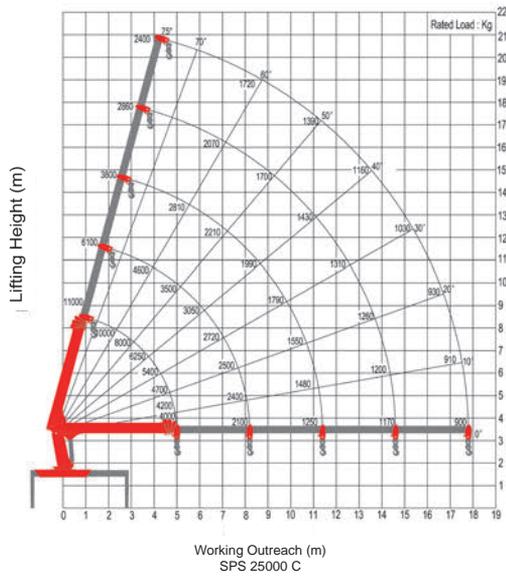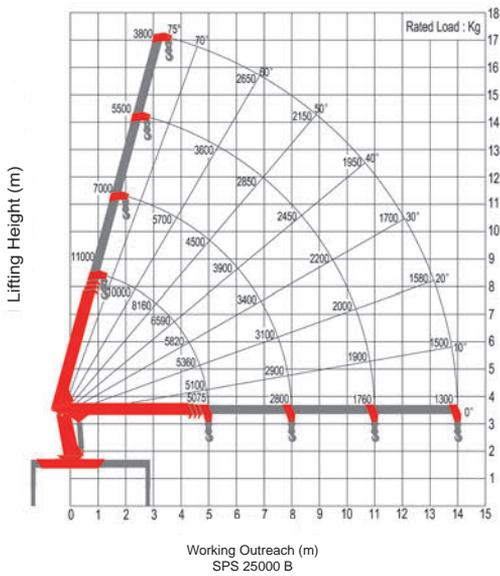


SPS 30000



TECHNICAL SPECIFICATIONS

	SPS 30000 B	SPS 30000 C
No. of Booms	4	5
Lifting Moment	30 mt	30 mt
Lifting Capacity	12000 kg (2.5 m)	12000 kg (2.5 m)
Max. Outreach	14.5 m	18.2 m
Deadweight of the crane	4180 kg/4200 kg (Floor Control/Top Seat Control)	5080 kg/5100 kg (Floor Control/Top Seat Control)

LIFTING CHART

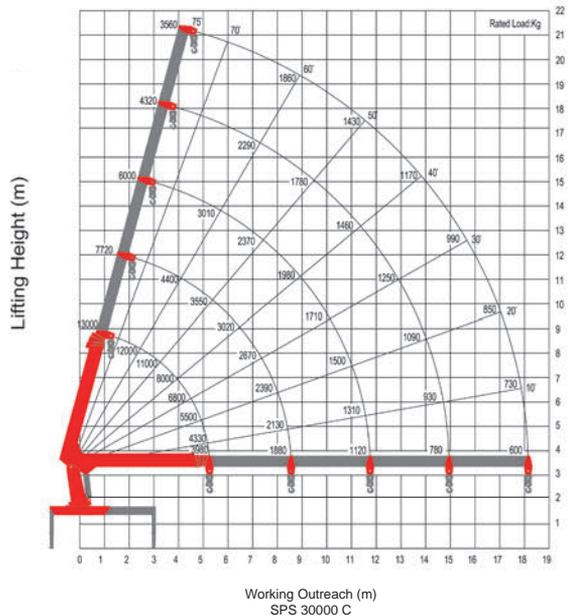


SPS 30000 PRO-SC



TECHNICAL SPECIFICATIONS

SPS 30000 B-H PRO	
No. of Booms	4
Lifting Moment	30 mt
Lifting Capacity	12000 kg (2.5m)
Max. Outreach	15.9 m
Deadweight of the crane	4300 kg

LIFTING CHART

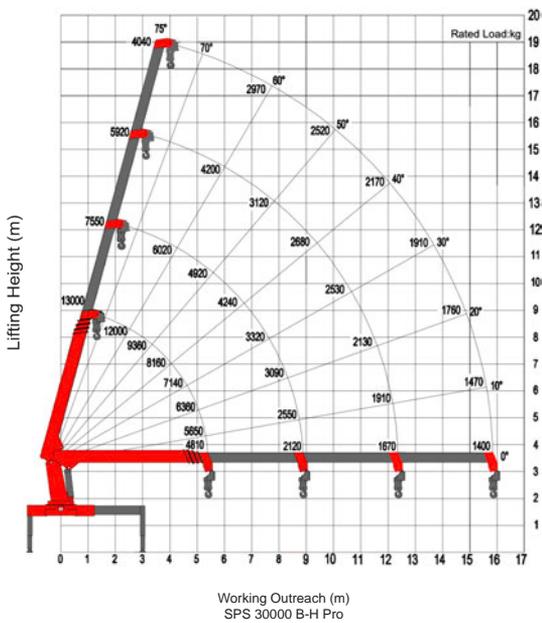


SPS 30000 PRO-DC



TECHNICAL SPECIFICATIONS

SPS 30000 C-H PRO	
No. of Booms	5
Lifting Moment	30 mt
Lifting Capacity	12000 kg (2.5 m)
Max. Outreach	19.2 m
Deadweight of the crane	5600 kg

LIFTING CHART

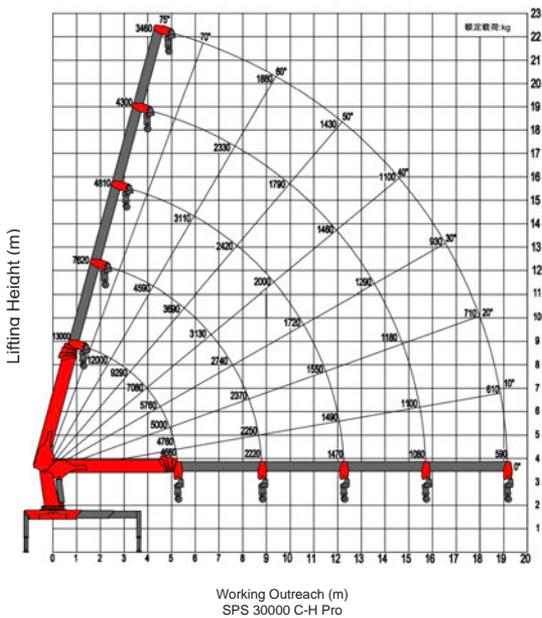



SPS 35000



TECHNICAL SPECIFICATIONS

	SPS 35000 B	SPS 35000 C
No. of Booms	4	5
Lifting Moment	35 mt	35 mt
Lifting Capacity	14000 kg (2.5 m)	14000 kg (2.5 m)
Max. Outreach	15 m	18.1 m
Deadweight of the crane	4430 kg/4450 kg (Floor Control/Top Seat Control)	5530 kg/5550 kg (Floor Control/Top Seat Control)

LIFTING CHART

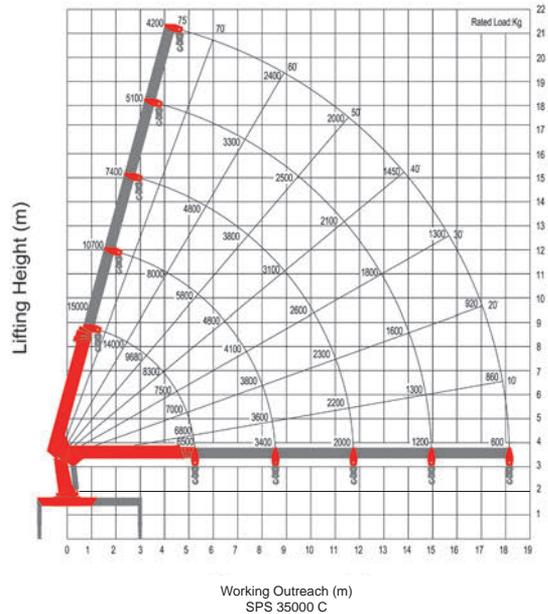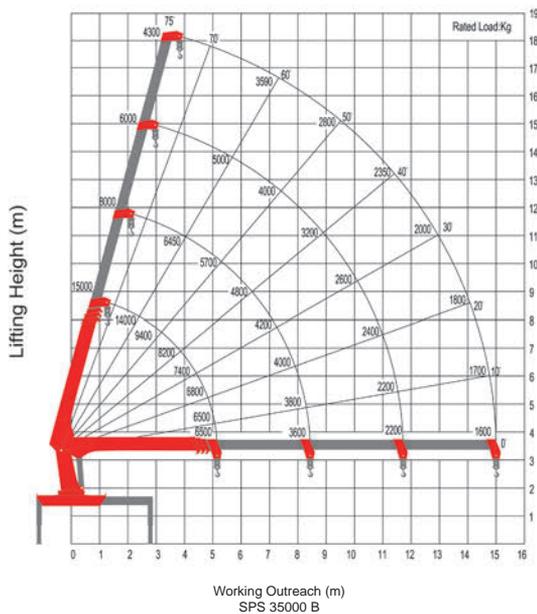



SPS 35000 PRO-DC



TECHNICAL SPECIFICATIONS

	SPS 35000 B PRO-SC	SPS 35000 C PRO-DC
No. of Booms	4	5
Lifting Moment	35 mt	35 mt
Lifting Capacity	14000 kg (2.5m)	14000 kg (2.5m)
Max. Outreach	16.6 m	19.4 m
Deadweight of the crane	4960 kg	5950 kg

LIFTING CHART

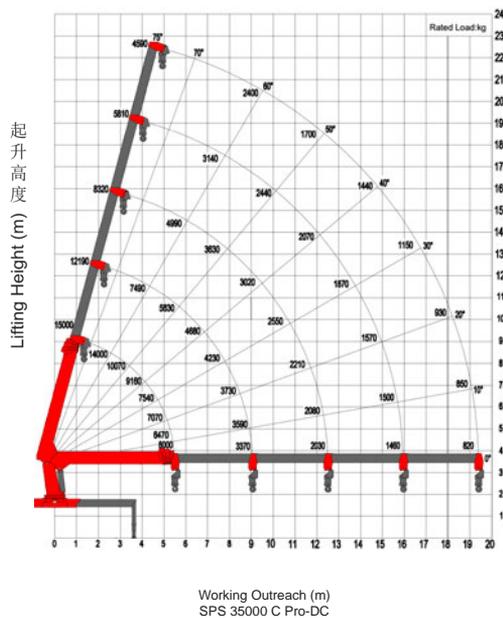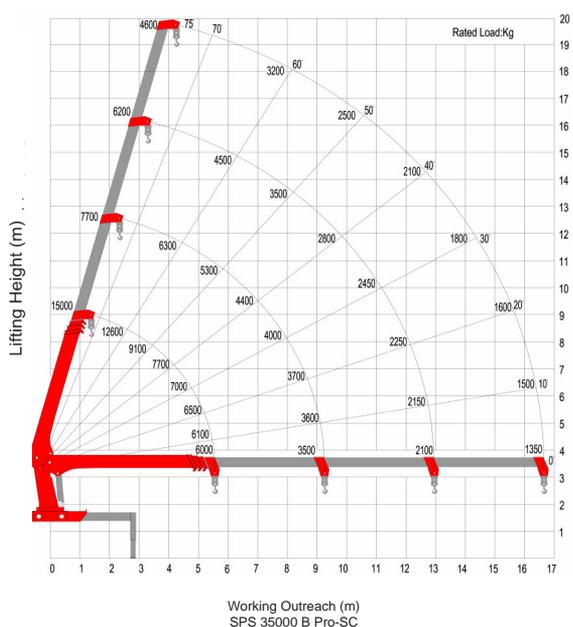


SPS 40000



TECHNICAL SPECIFICATIONS

SPS 40000 C	
No. of Booms	5
Lifting Moment	40 mt
Lifting Capacity	16000 kg (2.5 m)
Max. Outreach	18.6 m (5 booms)
Deadweight of the crane	6000 kg (Top Seat Control)

LIFTING CHART

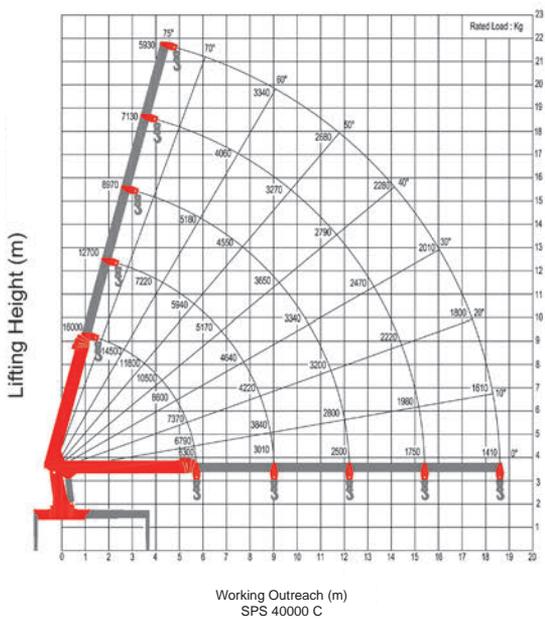


SPS 40000 PRO-DC



TECHNICAL SPECIFICATIONS

SPS 40000 C PRO-DC	
No. of Booms	5
Lifting Moment	40 mt
Lifting Capacity	16000 kg (2.5 m)
Max. Outreach	22.55 m (5 booms)
Deadweight of the crane	6560 kg

LIFTING CHART

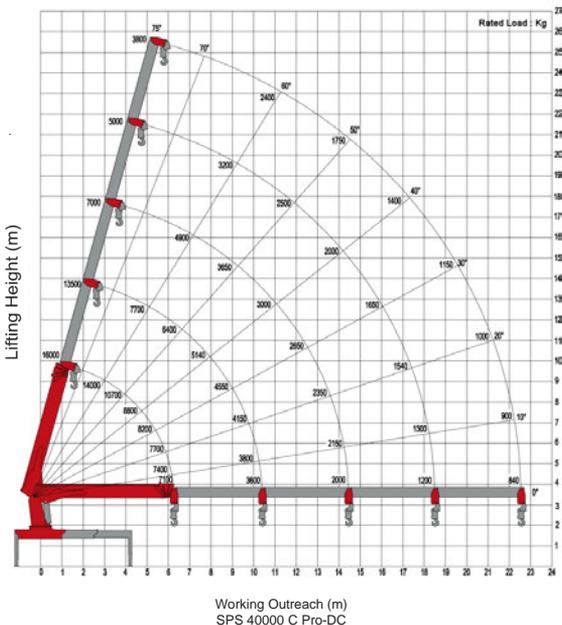


SPS 45000



TECHNICAL SPECIFICATIONS

SPS 45000 C	
No. of Booms	5
Lifting Moment	45 mt
Lifting Capacity	18000 kg (2.5 m)
Max. Outreach	18.6 m (5 booms)
Deadweight of the crane	6020 kg (Top Seat Control)

LIFTING CHART

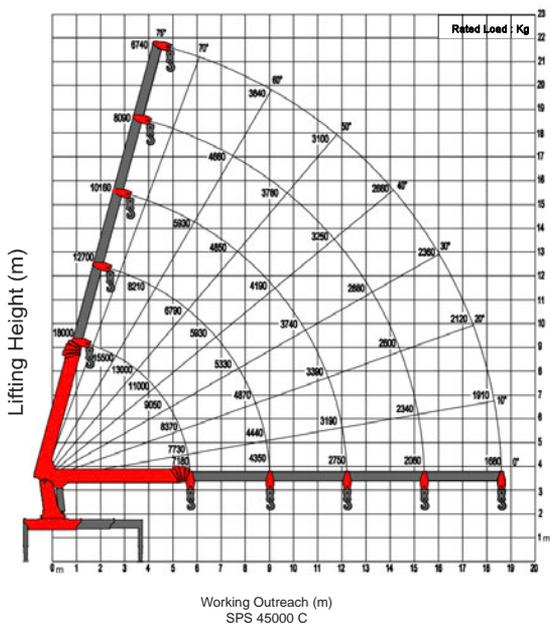


SPS 45000 PRO-DC



TECHNICAL SPECIFICATIONS

SPS 45000 PRO-DC	
No. of Booms	5
Lifting Moment	45 mt
Lifting Capacity	18000 kg (2.5 m)
Max. Outreach	22.55 m (5 booms)
Deadweight of the crane	6760 kg

LIFTING CHART

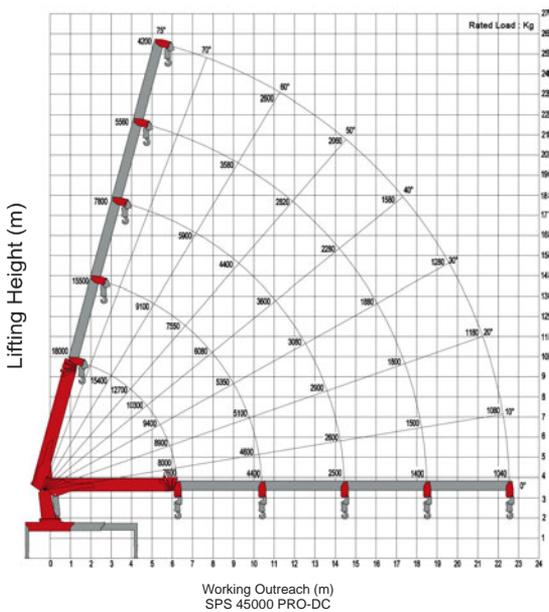


SPS 50000



TECHNICAL SPECIFICATIONS

SPS 50000 C	
No. of Booms	5
Lifting Moment	50 mt
Lifting Capacity	20000 kg (2.5 m)
Max. Outreach	21.2 m
Deadweight of the crane	6800 kg

LIFTING CHART

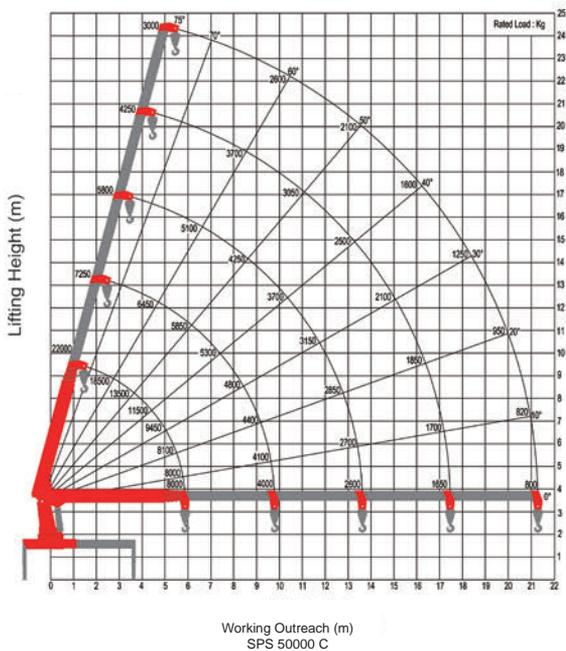

MODEL LINES AND OPTIONAL FEATURES

	Max. lifting moment [mt]	Max. lifting capacity [kg]	Max. hydraulic outreach [m]	Max. hydraulic outreach lifting capacity [kg]	Max. number of extension boom	Swinging angle [°]	Swinging moment [mt]	Max. stabilizer spread [mm]	Std. stabilizer spread [mm]	Fitting space required [mm]	Width folded [mm]	Max. operating pressure [bar]	Recommended pump capacity [l/min]	Dead weight standard crane [kg]
SPK 6500	5.8 mt	3300	9.6 m	530	3(B)	400°	0.7 mt	4950	3000	598	2309	315	20-30	708
SPK 8500	7.6 mt	3300	9.6 m	720	3(B)	400°	0.9 mt	4870	4870	660	2295	315	25-35	920
SPK 10000	9.5 mt	5700	12.4 m	590	4(C)	400°	1.2 mt	4870	4870	657	2500	315	30-45	1071
SPK 12000	11.6 mt	6790	14.6 m	530	5(D)	420°	1.4 mt	5600	5600	775	2489	300	35-50	1440
SPK 15500	14.6 mt	6200	14.5 m	650	5(D)	420°	1.8 mt	5600	5600	810	2500	300	40-60	1689
SPK 18500	18.3 mt	8000	14.6 m	940	5(D)	400°	2.3 mt	6616	5640	873	2496	300	45-65	2207
SPK 23500	23.0 mt	10000	16.7 m	960	6(E)	400°	2.8 mt	6616	5640	875	2500	300	50-75	2376
SPK 32080	30.4 mt	8500	14.3 m	1790	5(D)	400°	3.8 mt	6000	6000	972	2484	300	55-80	3130
SPK 36080	34.8 mt	8500	14.2 m	2070	5(D)	400°	3.8 mt	6000	6000	975	2500	330	55-80	3118
SPK 38502	38.2 mt	13000	16.8 m	1650	6(E)	400°	5.0 mt	6600	6600	1210	2500	300	55-80	3970
SPK 42502	42.3 mt	14340	16.8 m	1900	6(E)	400°	5.0 mt	6600	6600	1210	2500	330	80-100	3970
SPK 55502	53.9 mt	20000	15.9 m	3050	6(E)	370°	6.5 mt	7400	7400	1560	2550	330	60-80	5358
SPK 56002	52.6 mt	19000	20.4 m	1660	8(G)	Continuous	7.0 mt	8600	8600	1510	2572	320	80-100	5276
SPK 60002	58.3 mt	20400	20.4 m	2000	8(G)	Continuous	7.0 mt	8600	8600	1510	2550	350	80-100	5276
SPK 61502	57.3 mt	21500	16.0 m	3050	6(E)	Continuous	6.5 mt	7401	7401	1559	2550	350	80-100	5294

MODEL LINES AND OPTIONAL FEATURES

	Max. lifting moment [mt]	Max. lifting capacity [kg]	Max. hydraulic outreach [m]	Max. hydraulic outreach lifting capacity [kg]	Max. number of extension boom	Slewing angle [°]	Slewing moment [mt]	Max. stabilizer spread [mm]	Std. stabilizer spread [mm]	Fitting space required [mm]	Width folded [mm]	Max. operating pressure [bar]	Recommended pump capacity [l/min]	Dead weight standard crane [kg]
SPK 70002	63.3 mt	23000	20.4 m	2250	8(G)	Continuous	7.0 mt	8600	8600	1519	2550	350	60-80	6093
SPK 74002	70.1 mt	23000	20.4 m	2500	8(G)	Continuous	7.0 mt	8600	8600	1510	2550	350	80-100	5755




2 - AXLE TRUCKS

SPK 6500



SPK 8500

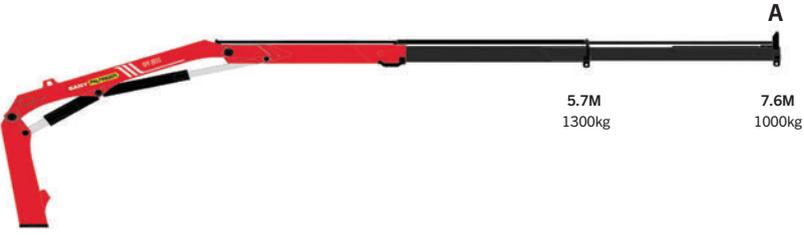

SPK 10000



SPK 12000



SPK 15500



SPK 18500



The information on this brochure including but not limited to the specifications shown. Illustrations shown in the leaflet do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.

FEATURES AND OPTIONS



Ergonomic Crane Control

- Ergonomically arranged operating levers for all crane functions
- Functional design for better comfort during crane operation
- Straightforward service and maintenance



High Density Paint

- Top quality surface paint with corrosion protection
- Long term UV-resistant coating
- Aesthetically pleasing and attractive colour



Hydraulic Overload Safety Device

- Prevents the crane from overloading
- Overload protection system with emergency cut-off function
- Stops all movements of the crane that increases load



Radio Remote Control

- Efficient control of the crane remotely
- Safe crane operation outside of the danger zone
- Easy maintenance and quick troubleshooting



Top Seat

- Excellent visibility of the surrounding area
- Foldable sun protection umbrella for hot weather
- Seat cover to prevent exposure from sun



Hose Equipment for Attachments

- Additional hydraulic functions for attachments
- Simple installation with hose tray protection
- Diverse applications suitable for different industry



Load Holding Valve

- Holds the cylinder in position
- Standard fittings on all cylinder
- Strategic positioned to protect from damage




High speed extension

- Increase extension and retraction speed of the boom system
- Crane works faster with return oil utilization
- Time saving during crane operation

SPK 6500






LIFTING DIAGRAM

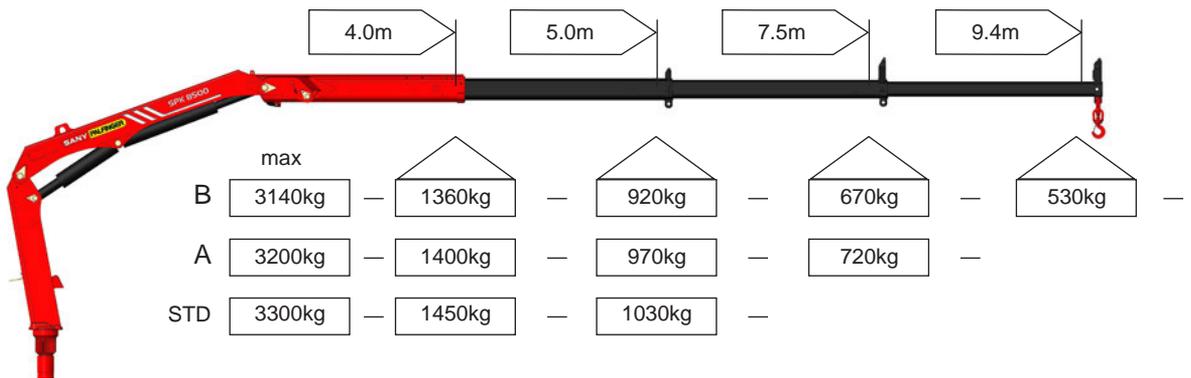

	SPK 6500 STD	SPK 6500 A	SPK 6500 B
No. of Booms	1	2	3
Lifting Moment	5.8 mt	5.6 mt	5.4 mt
Lifting Capacity	3300 kg	3200 kg	3140 kg
Max. Outreach	5.7 m	7.6 m	9.6 m
Standard crane weight	708 kg	775 kg	836 kg


LIFTING CHART

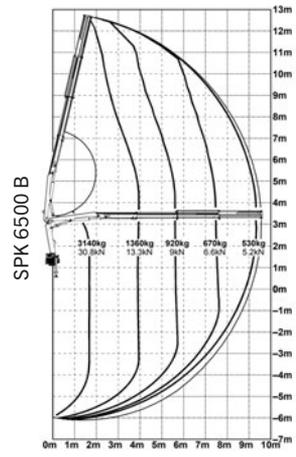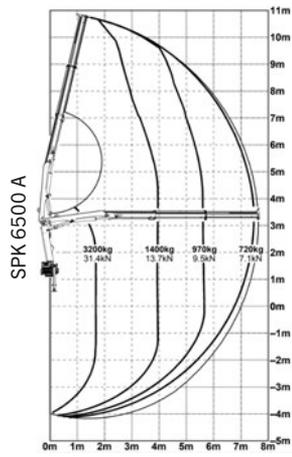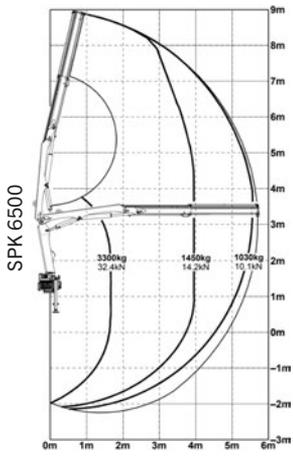

SPK 8500




LIFTING DIAGRAM

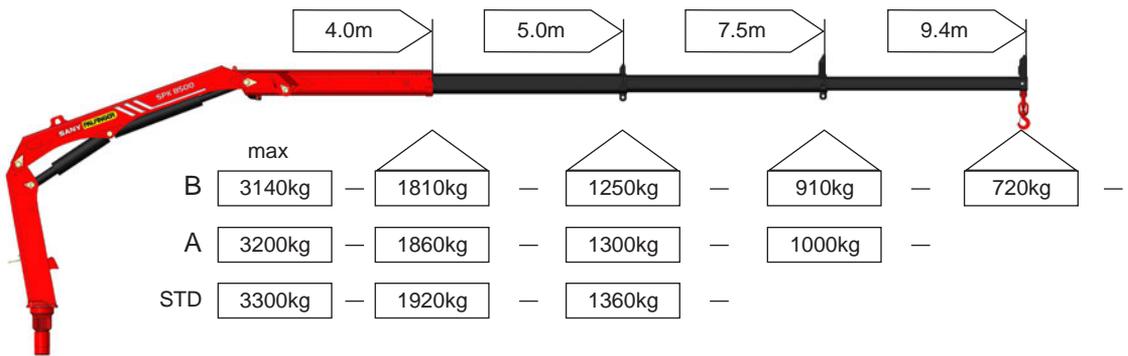


	SPK 8500 STD	SPK 8500 A	SPK 8500 B
No. of Booms	1	2	3
Lifting Moment	7.6 mt	7.4 mt	7.2 mt
Lifting Capacity	3300 kg	3200 kg	3140 kg
Max. Outreach	5.7 m	7.6 m	9.6 m
Standard crane weight	875 kg	950 kg	1081 kg

LIFTING CHART


SPK 8500

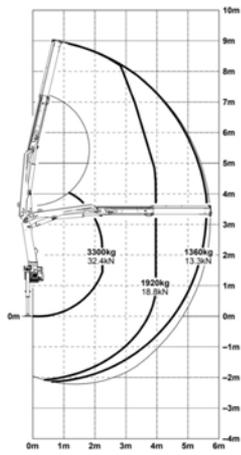

SPK 8500 A

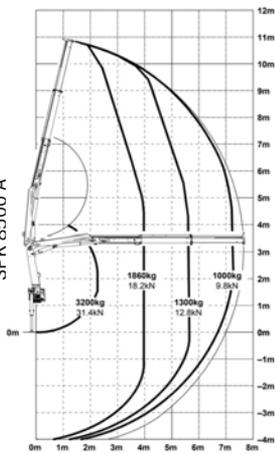


SPK 8500 B

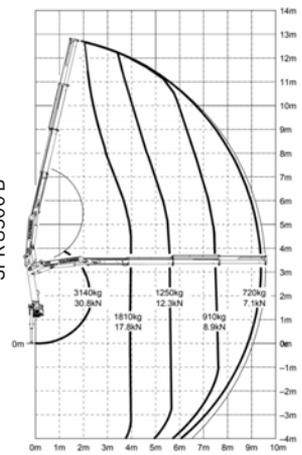

SPK 10000







LIFTING DIAGRAM

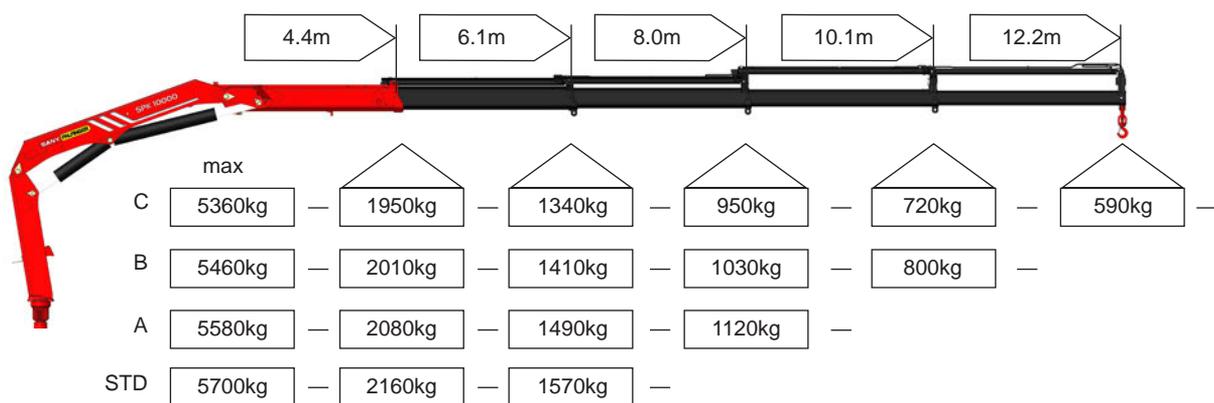

	SPK 10000 STD	SPK 10000 A	SPK 10000 B	SPK 10000 C
No. of Booms	1	2	3	4
Lifting Moment	9.5 mt	9.2 mt	8.9 mt	8.6 mt
Lifting Capacity	5700 kg	5580 kg	5460 kg	5360 kg
Max. Outreach	6.2 m	8.2 m	10.3 m	12.4 m
Standard crane weight	1031 kg	1129 kg	1232 kg	1232 kg


LIFTING CHART

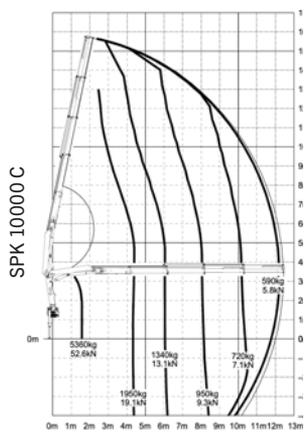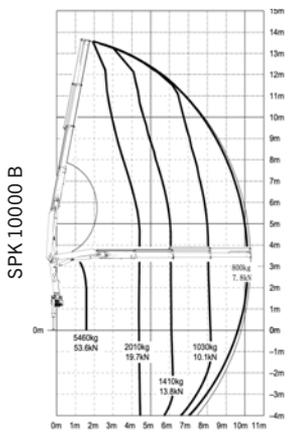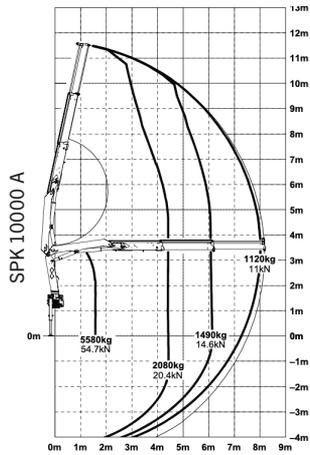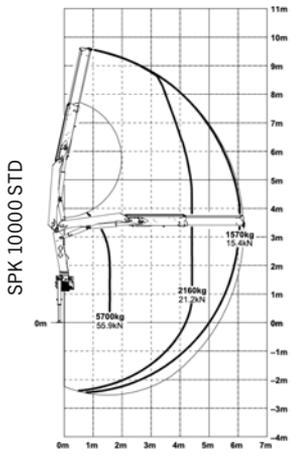

SPK 12000








LIFTING DIAGRAM

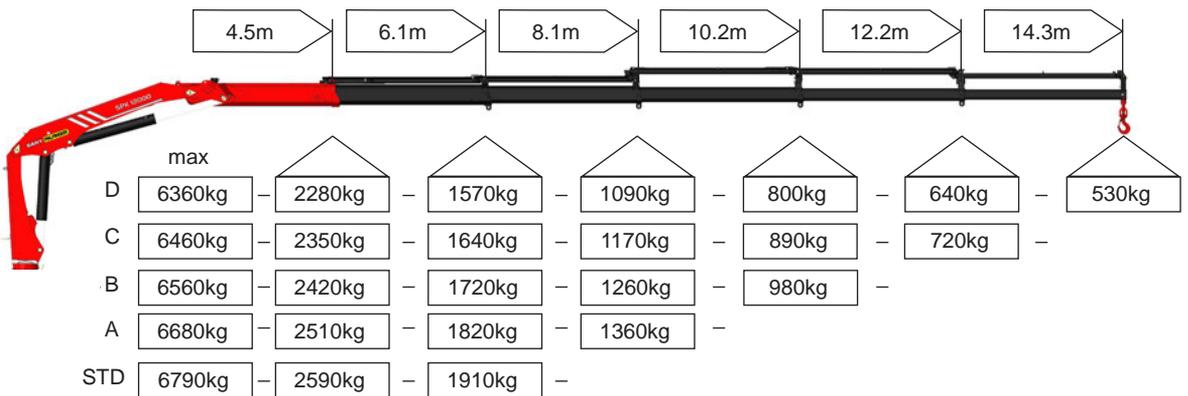

	SPK 12000 STD	SPK 12000 A	SPK 12000 B
No. of Booms	1	2	3
Lifting Moment	11.6 mt	11.3 mt	11.1 mt
Lifting Capacity	6790 kg	6680 kg	6560 kg
Max. Outreach	6.2 m	8.2 m	10.3 m
Standard crane weight	1380 kg	1491 kg	1607 kg

	SPK 12000 C	SPK 12000 D
No. of Booms	4	5
Lifting Moment	10.6 mt	10.3 mt
Lifting Capacity	6460 kg	6360 kg
Max. Outreach	12.4 m	14.6 m
Standard crane weight	1713 kg	1811 kg


LIFTING CHART

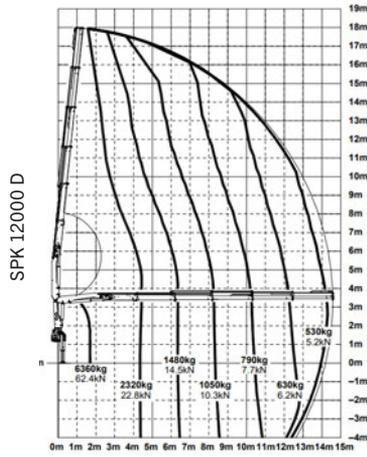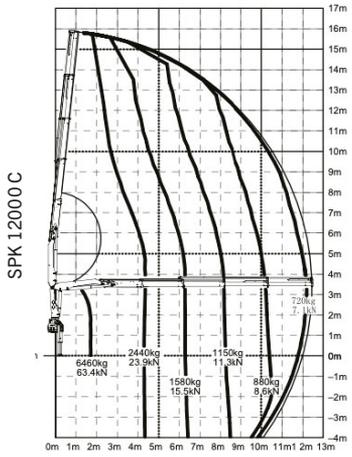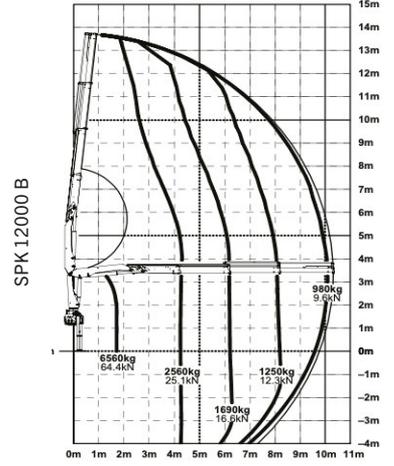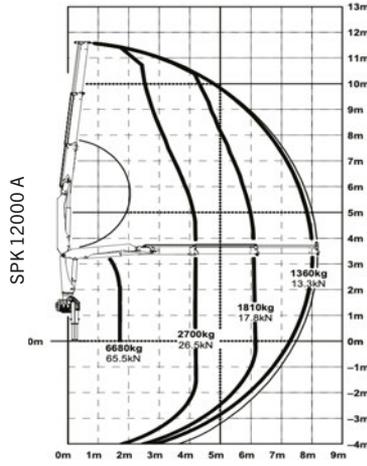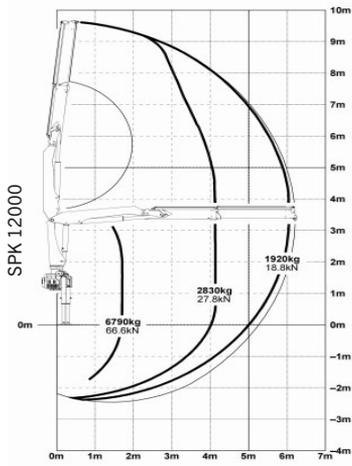

SPK 15500




LIFTING DIAGRAM

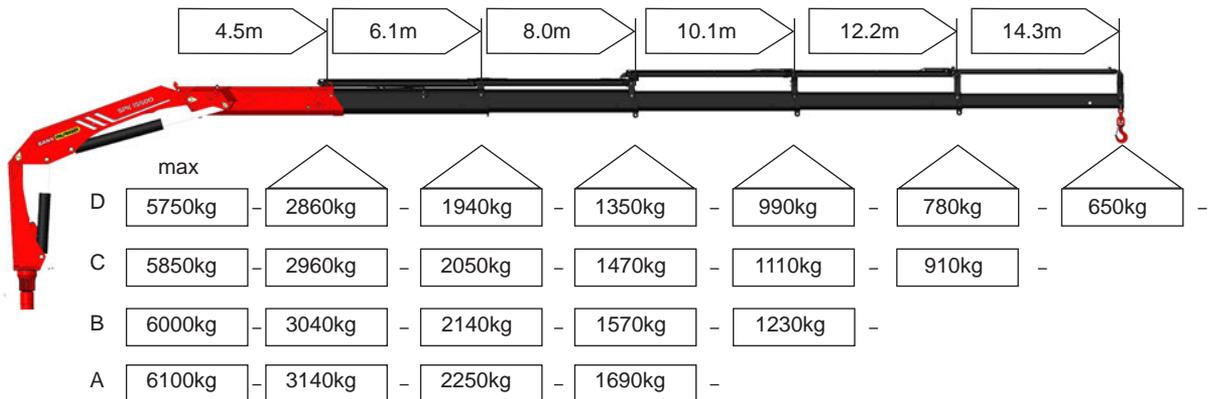


	SPK 15500 A	SPK 15500 B	SPK 15500 C	SPK 15500 D
No. of Booms	2	3	4	5
Lifting Moment	14.1 mt	13.7 mt	13.3 mt	12.8 mt
Lifting Capacity	6100 kg	6000 kg	5850 kg	5750 kg
Max. Outreach	8.1 m	10.3 m	12.4 m	14.5 m
Standard crane weight	1769 kg	1904 kg	2029 kg	2170 kg

LIFTING CHART


SPK 15500 A

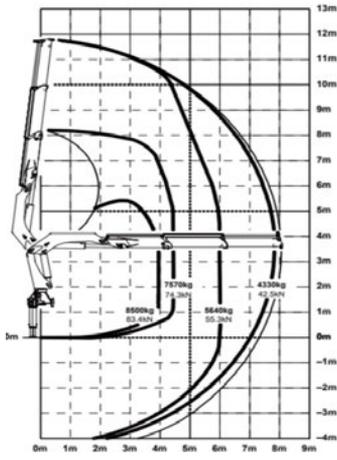


SPK 15500 B

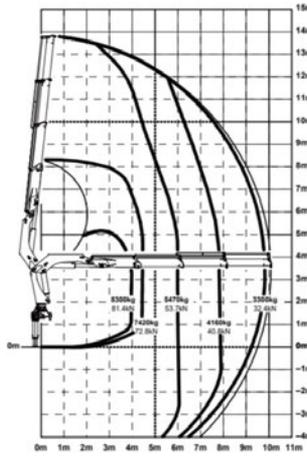

SPK 15500 C

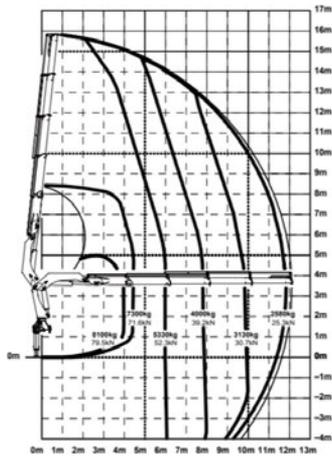


SPK 15500 D

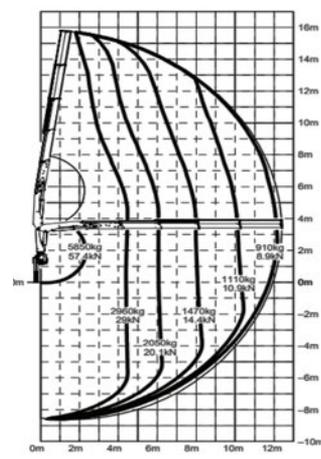

SPK 18500




LIFTING DIAGRAM

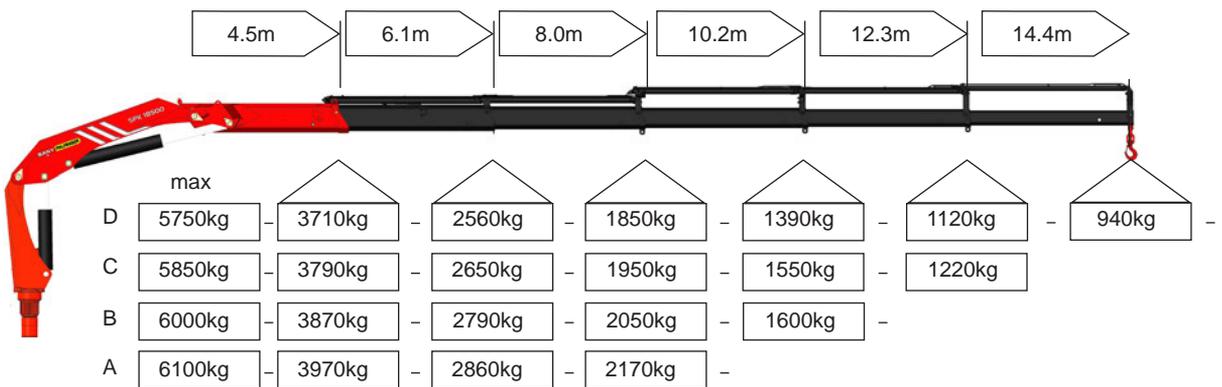


	SPK 18500 A	SPK 18500 B	SPK 18500 C	SPK 18500 D
No. of Booms	2	3	4	5
Lifting Moment	17.9 mt	17.4 mt	17 mt	16.6 mt
Lifting Capacity	6100 kg	6000 kg	5850 kg	5750 kg
Max. Outreach	8.2 m	10.3 m	12.4 m	14.6 m
Standard crane weight	2117 kg	2253 kg	2374 kg	2490 kg

LIFTING CHART


SPK 18500 A

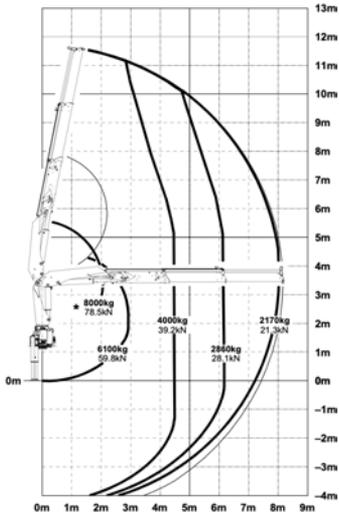


SPK 18500 B

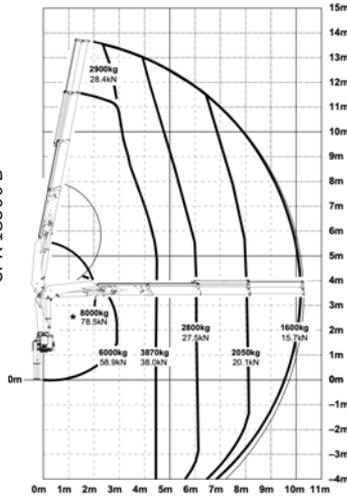

SPK 18500 C

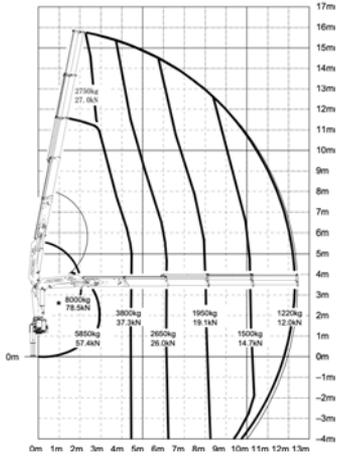


SPK 18500 D

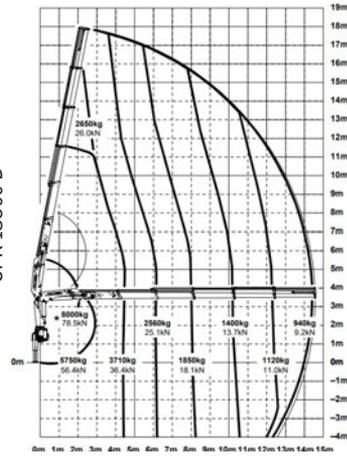

SPK 23500



LIFTING DIAGRAM

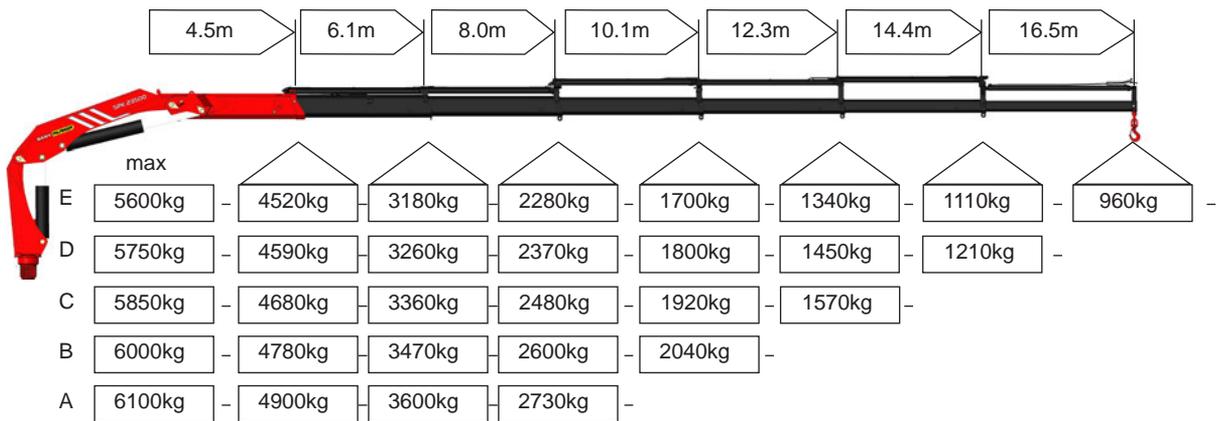


	SPK 23500 A	SPK 23500 B	SPK 23500 C
No. of Booms	2	3	4
Lifting Moment	22.4 mt	21.9 mt	21.5 mt
Lifting Capacity	6100 kg	6000 kg	5850 kg
Max. Outreach	8.2 m	10.3 m	12.4 m
Standard crane weight	2346 kg	2506 kg	2646 kg


	SPK 23500 D	SPK 23500 E
No. of Booms	5	6
Lifting Moment	21 mt	20.7 mt
Lifting Capacity	5750 kg	5600 kg
Max. Outreach	14.5 m	16.7 m
Standard crane weight	2782 kg	2895 kg

LIFTING CHART


SPK 23500 A

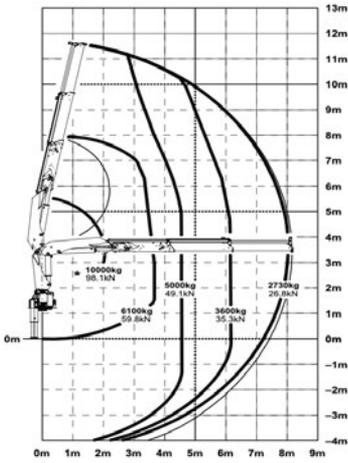


SPK 23500 B

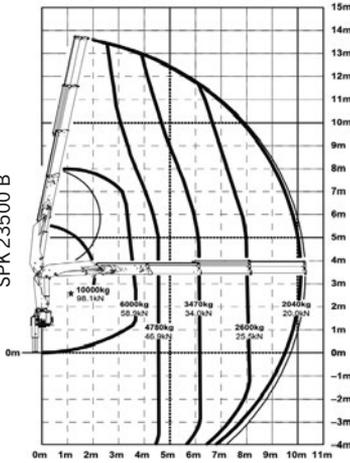


SPK 23500 C

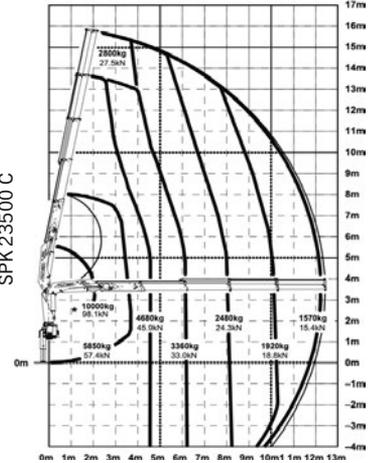

SPK 23500 D

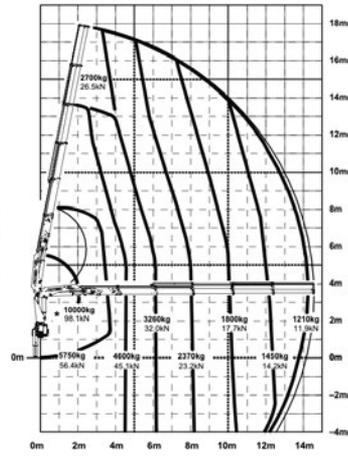


SPK 23500 E

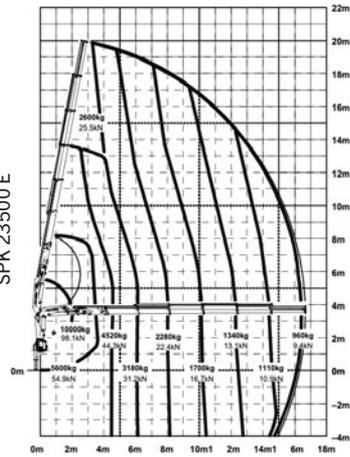

SPK 32080




LIFTING DIAGRAM

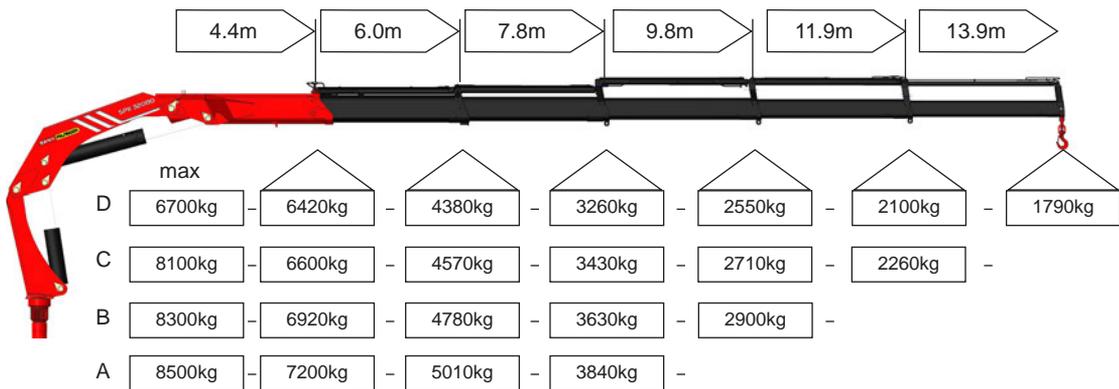


	SPK 32080 A	SPK 32080 B	SPK 32080 C	SPK 32080 D
No. of Booms	2	3	4	5
Lifting Moment	30.2 mt	29.6 mt	29 mt	28.5 mt
Lifting Capacity	8500 kg	8300 kg	8100 kg	6700 kg
Max. Outreach	8.1 m	10.1 m	12.2 m	14.3 m
Standard crane weight	3130 kg	3360 kg	3510 kg	3650 kg

LIFTING CHART


SPK 32080 A

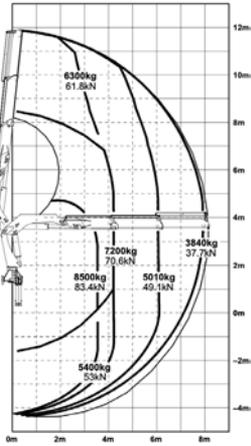


SPK 32080 B

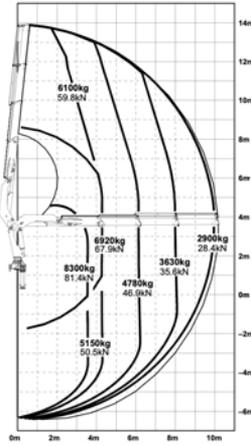

SPK 32080 C

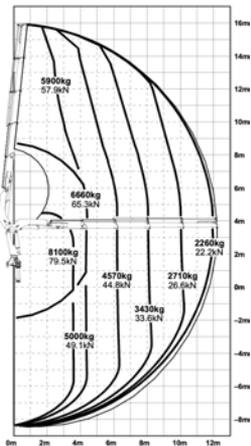


SPK 32080 D

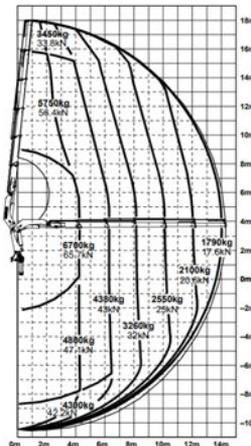

SPK 36080







LIFTING DIAGRAM

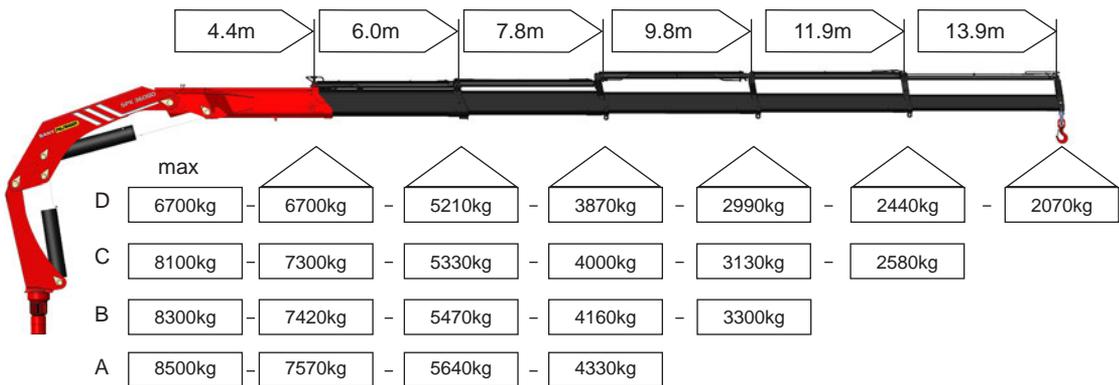

	SPK 36080 A	SPK 36080 B	SPK 36080 C	SPK 36080 D
No. of Booms	2	3	4	5
Lifting Moment	34.8 mt	34.8 mt	34.8 mt	34.8 mt
Lifting Capacity	8500 kg	8300 kg	8100 kg	6700 kg
Max. Outreach	8.1 m	10.1 m	12.1 m	14.2 m
Standard crane weight	3118 kg	3323 kg	3513 kg	3673 kg


LIFTING CHART

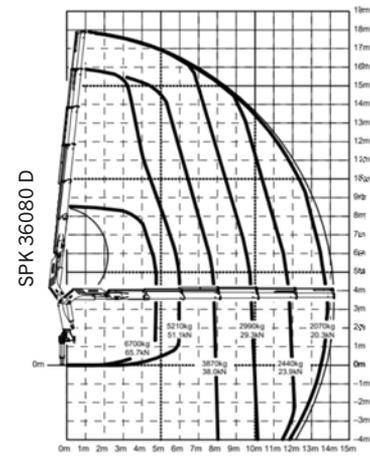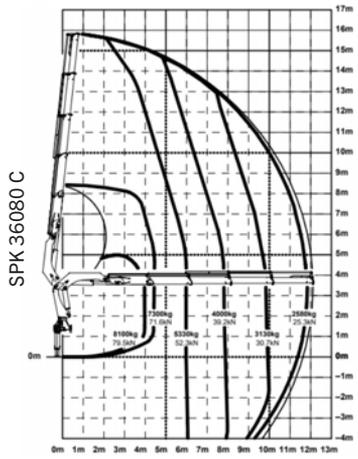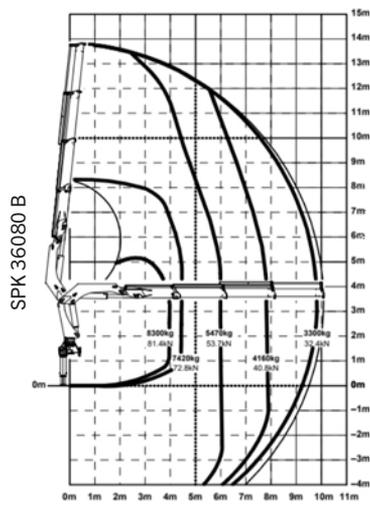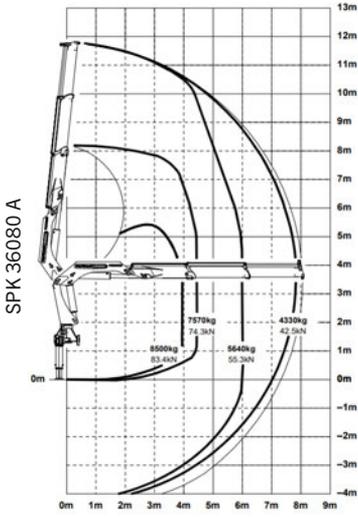

SPK 38502



LIFTING DIAGRAM

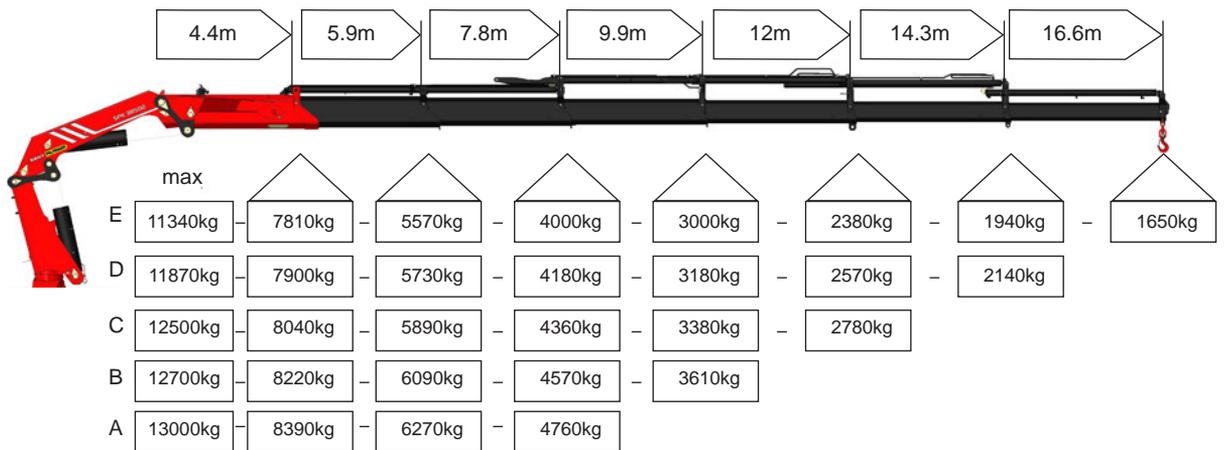


	SPK 38502 A	SPK 38502 B	SPK 38502 C
No. of Booms	2	3	4
Lifting Moment	38.2 mt	38.2 mt	38.2 mt
Lifting Capacity	13000 kg	12700 kg	12500 kg
Max. Outreach	8 m	10 m	12.1 m
Standard crane weight	3970 kg	4205 kg	4450 kg


	SPK 38502 D	SPK 38502 E
No. of Booms	5	6
Lifting Moment	38.2 mt	38.2 mt
Lifting Capacity	11340 kg	11340 kg
Max. Outreach	14.5 m	16.8 m
Standard crane weight	4680 kg	4900 kg

LIFTING CHART


SPK 38502 A

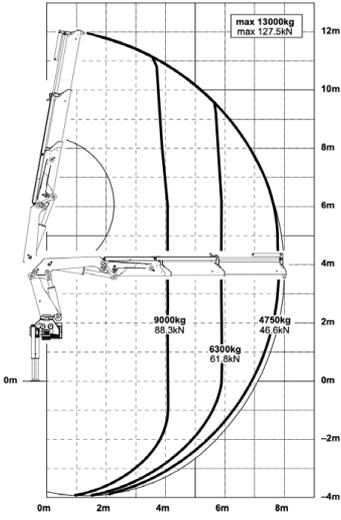


SPK 38502 B

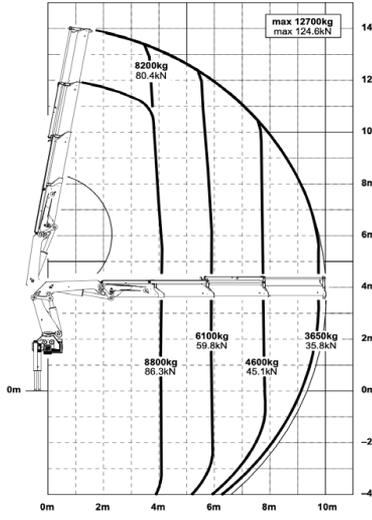


SPK 38502 C

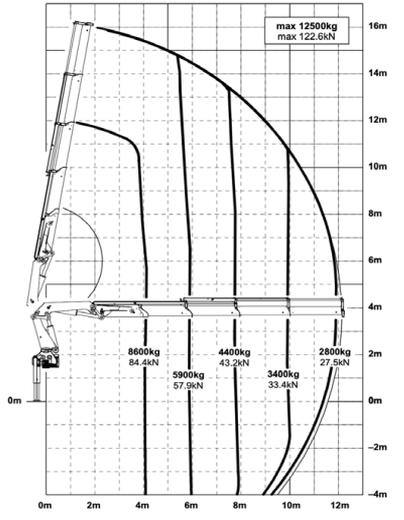

SPK 38502 D

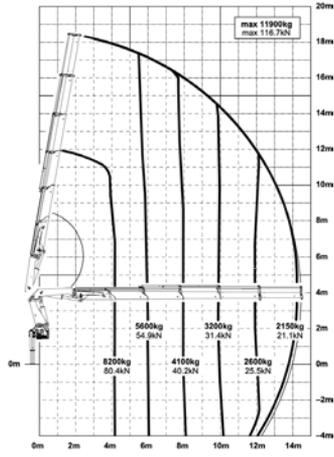


SPK 38502 E

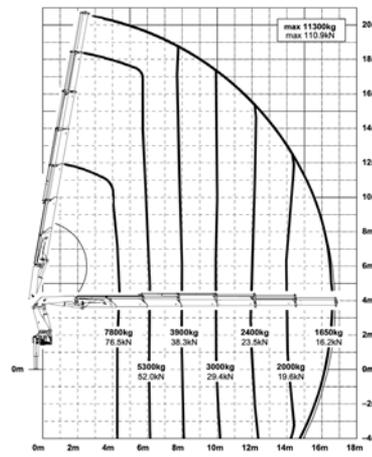

SPK 42502



LIFTING DIAGRAM

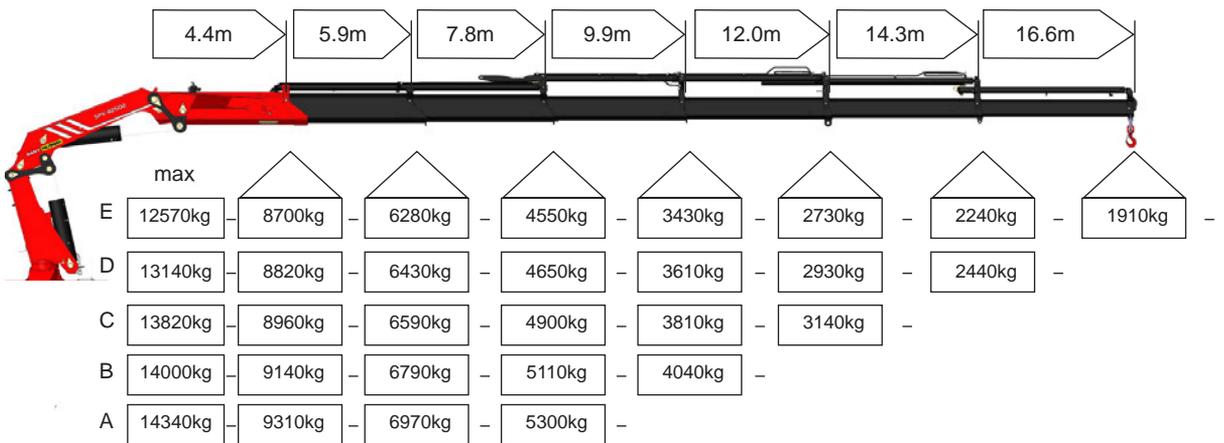


	SPK 42502 A	SPK 42502 B	SPK 42502 C
No. of Booms	2	3	4
Lifting Moment	42.3 mt	42.3 mt	42.3 mt
Lifting Capacity	14300 kg	14000 kg	13820 kg
Max. Outreach	8 m	10 m	12.1 m
Standard crane weight	3970 kg	4205 kg	4450 kg


	SPK 42502 D	SPK 42502 E
No. of Booms	5	6
Lifting Moment	42.3 mt	42.3 mt
Lifting Capacity	13100 kg	12570 kg
Max. Outreach	14.5 m	16.8 m
Standard crane weight	4680 kg	4900 kg

LIFTING CHART


SPK 42502 A

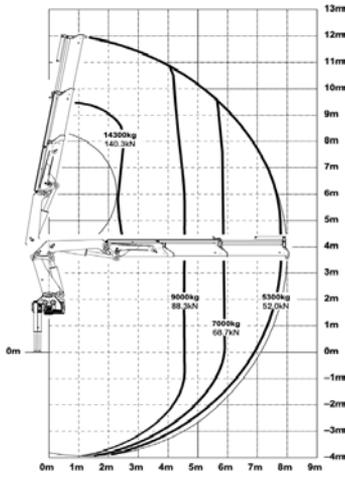


SPK 42502 B

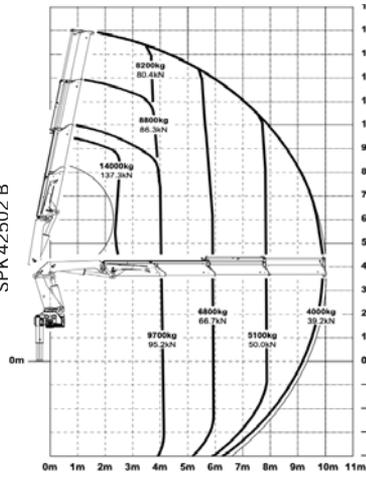


SPK 42502 C

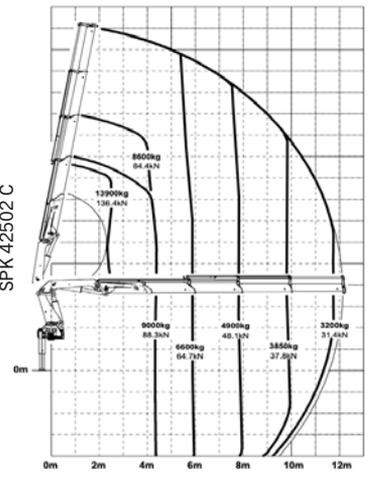

SPK 42502 D

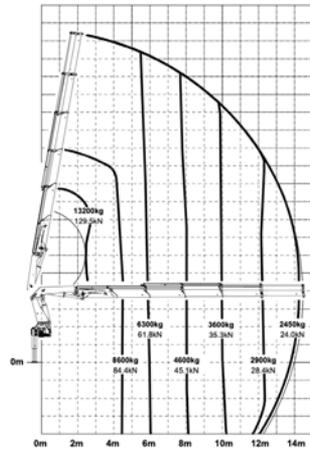


SPK 42502 E

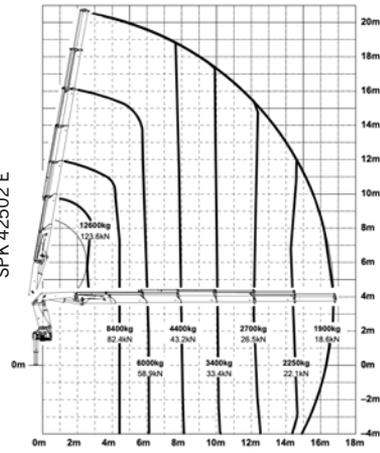

SPK 55502




LIFTING DIAGRAM

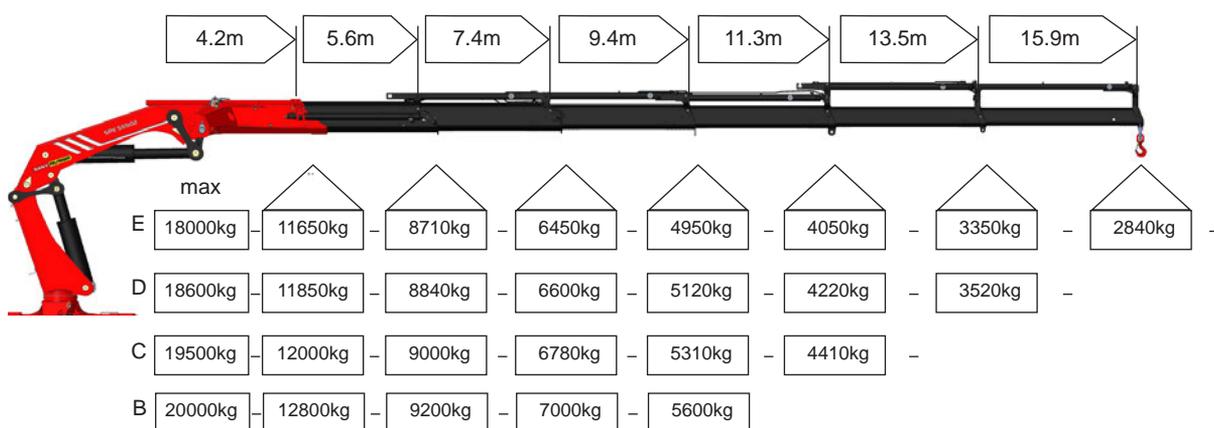


	SPK 55502 B	SPK 55502 C	SPK 55502 D	SPK 55502 E
No. of Booms	3	4	5	6
Lifting Moment	53.9 mt	53.9 mt	53.9 mt	53.9 mt
Lifting Capacity	20000 kg	19500 kg	18600 kg	18000 kg
Max. Outreach	9.5 m	11.5 m	13.7 m	15.9 m
Standard crane weight	5358 kg	5641 kg	5783 kg	6020 kg

LIFTING CHART


SPK 55502 B

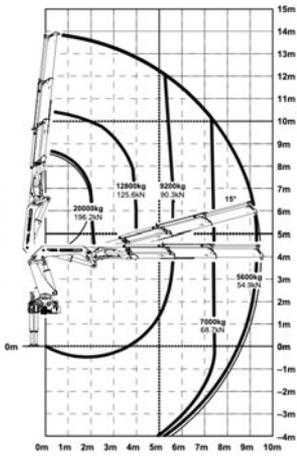


SPK 55502 C

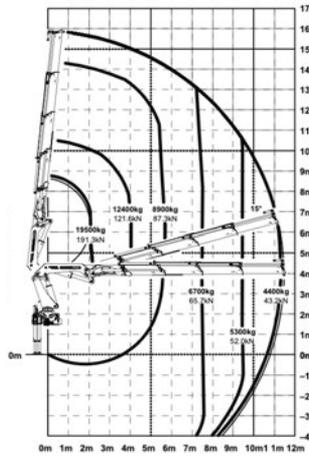

SPK 55502 D

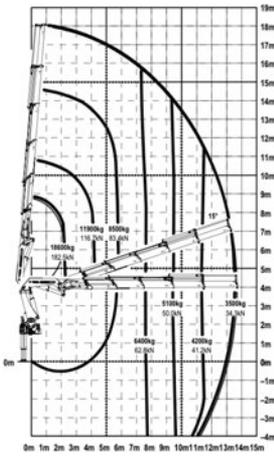


SPK 55502 E

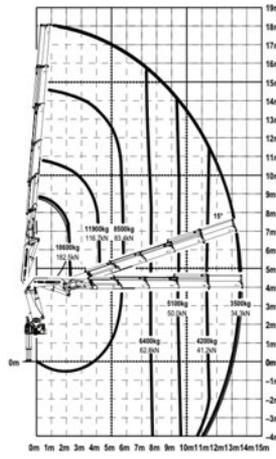

SPK 56002









LIFTING DIAGRAM

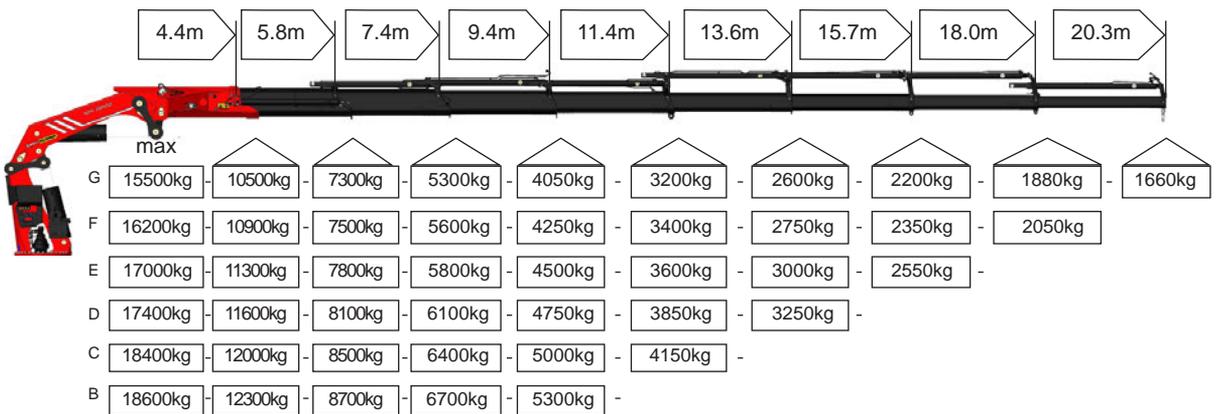

	SPK 56002 B	SPK 56002 C	SPK 56002 D
No. of Booms	3	4	5
Lifting Moment	52.6 mt	52.6 mt	52.6 mt
Lifting Capacity	18600 kg	18400 kg	17400 kg
Max. Outreach	9.5 m	11.5 m	13.7 m
Standard crane weight	5276 kg	5567 kg	5949 kg

	SPK 56002 E	SPK 56002 F	SPK 56002 G
No. of Booms	6	7	8
Lifting Moment	52.6 mt	52.6 mt	52.6 mt
Lifting Capacity	17000 kg	16200 kg	15500 kg
Max. Outreach	15.8 m	18.1 m	20.4 m
Standard crane weight	6222 kg	6435 kg	6615 kg


LIFTING CHART

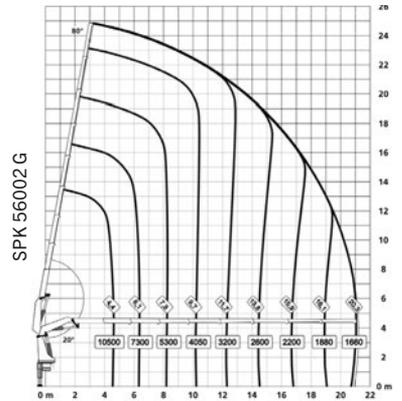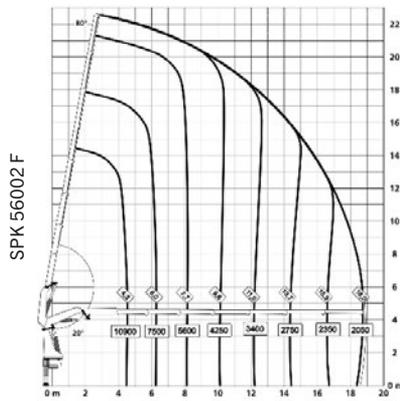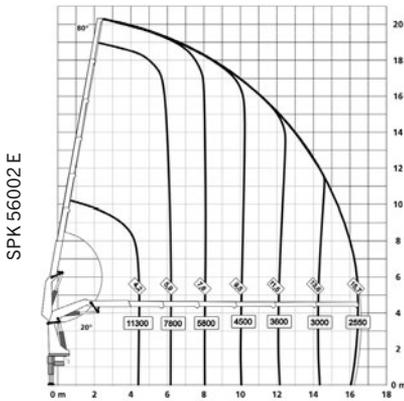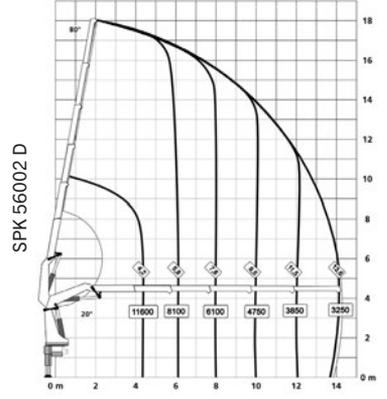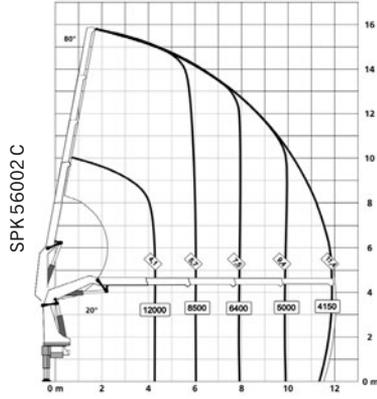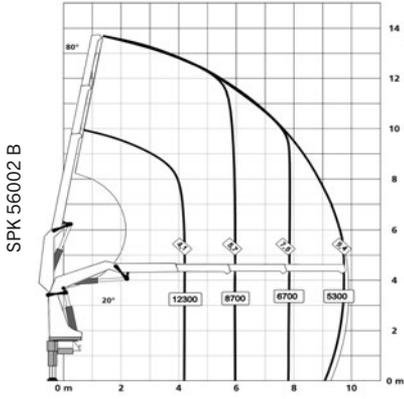

SPK 60002



LIFTING DIAGRAM

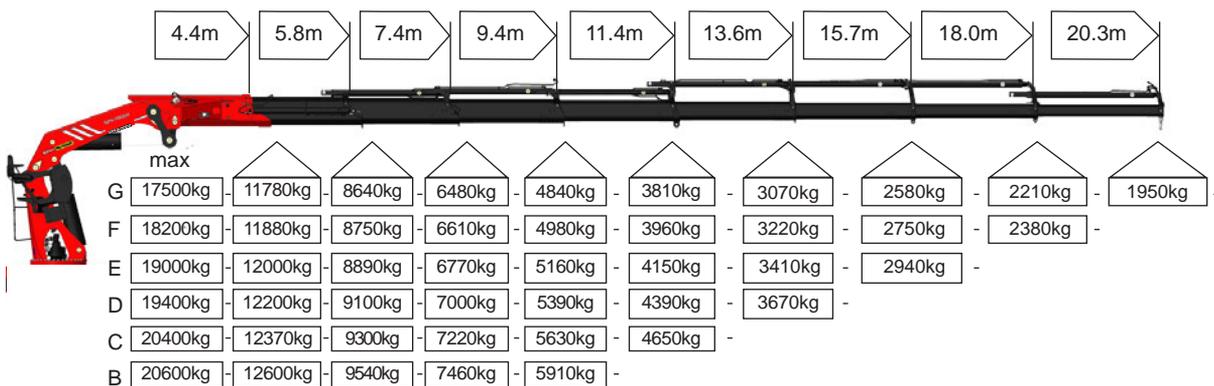


	SPK 60002 B	SPK 60002 C	SPK 60002 D
No. of Booms	3	4	5
Lifting Moment	58.3 mt	58.3 mt	58.3 mt
Lifting Capacity	20600 kg	20400 kg	19400 kg
Max. Outreach	9.5 m	11.5 m	13.7 m
Standard crane weight	5276 kg	5567 kg	5949 kg


	SPK 60002 E	SPK 60002 F	SPK 60002 G
No. of Booms	6	7	8
Lifting Moment	58.3 mt	58.3 mt	58.3 mt
Lifting Capacity	19000 kg	18200 kg	17500 kg
Max. Outreach	15.8 m	18.1 m	20.4 m
Standard crane weight	6222 kg	6435 kg	6615 kg

LIFTING CHART


SPK 60002 B

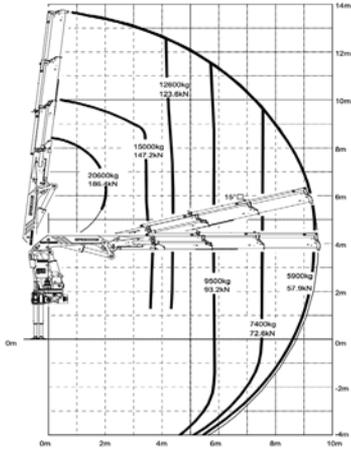


SPK 60002 C

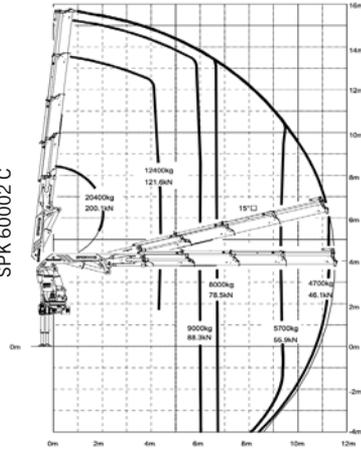


SPK 60002 D

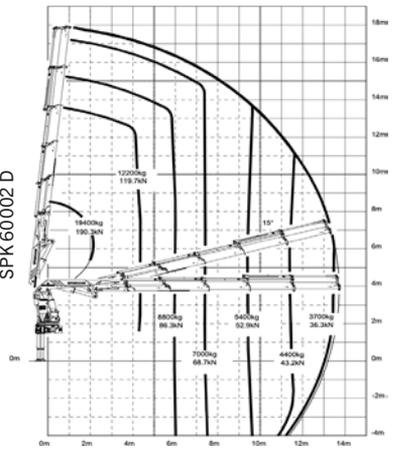


SPK 60002 E

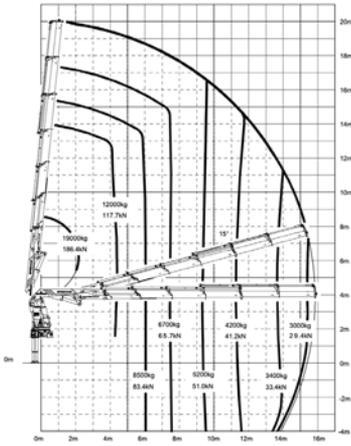

SPK 60002 F

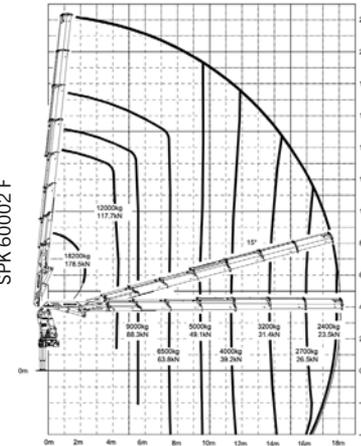


SPK 60002 G

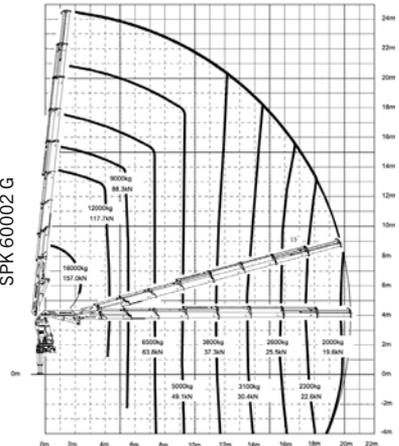

SPK 61502




LIFTING DIAGRAM

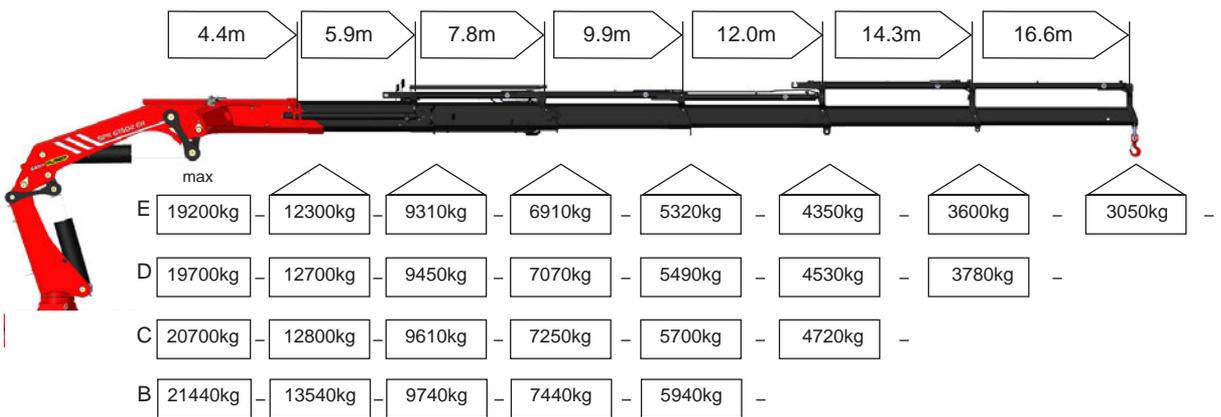


	SPK 61502 B	SPK 61502 C	SPK 61502 D	SPK 61502 E
No. of Booms	3	4	5	6
Lifting Moment	57.3 mt	57.3 mt	57.3 mt	57.3 mt
Lifting Capacity	21440 kg	20700 kg	19700 kg	19200 kg
Max. Outreach	9.5 m	11.5 m	13.7 m	16.0 m
Standard crane weight	5358 kg	5641 kg	5883 kg	6020 kg

LIFTING CHART


SPK 61502 B

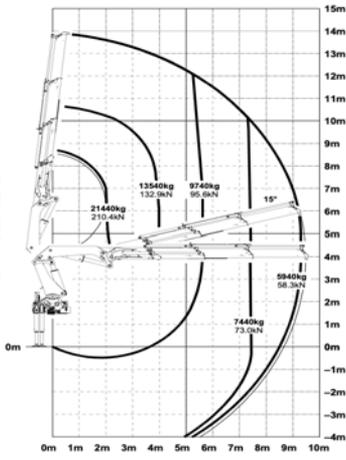


SPK 61502 C

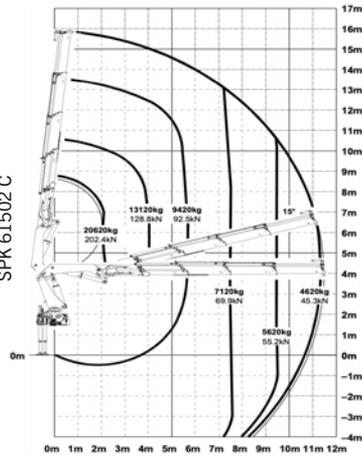

SPK 61502 D

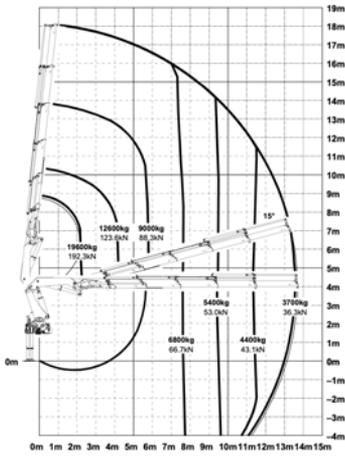


SPK 61502 E

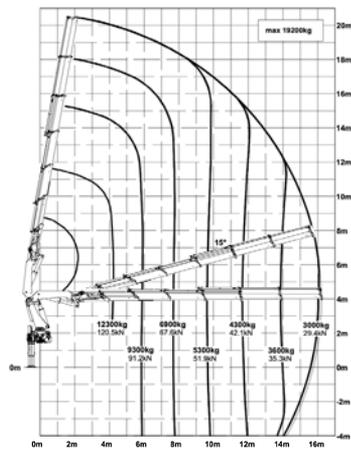

SPK 70002



LIFTING DIAGRAM

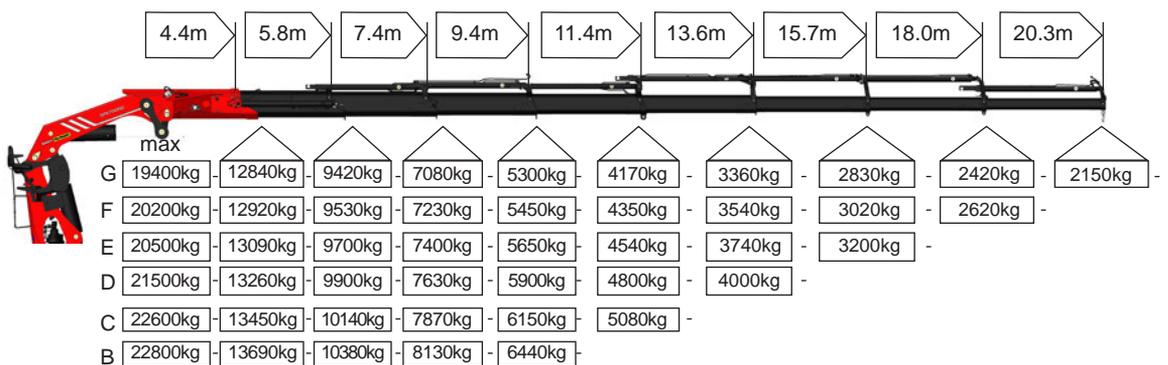


	SPK 70002 B	SPK 70002 C	SPK 70002 D
No. of Booms	3	4	5
Lifting Moment	63.3 mt	63.3 mt	63.3 mt
Lifting Capacity	22800 kg	22600 kg	21500 kg
Max. Outreach	9.5m	11.5 m	13.7 m
Standard crane weight	6093 kg	6401 kg	6798 kg


	SPK 70002 E	SPK 70002 F	SPK 70002 G
No. of Booms	6	7	8
Lifting Moment	63.3 mt	63.3 mt	63.3 mt
Lifting Capacity	20500 kg	20200 kg	19400 kg
Max. Outreach	15.8 m	18.1 m	20.4 m
Standard crane weight	7091 kg	7314 kg	7514 kg

LIFTING CHART


SPK 70002 B

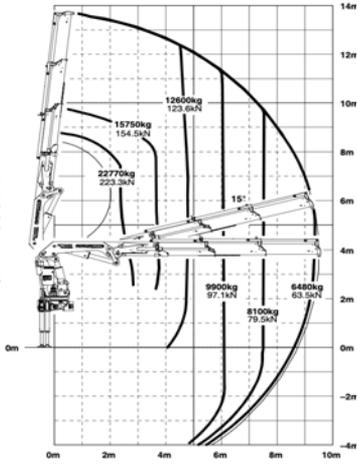


SPK 70002 C

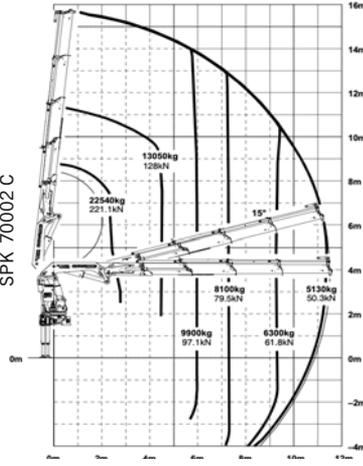


SPK 70002 D

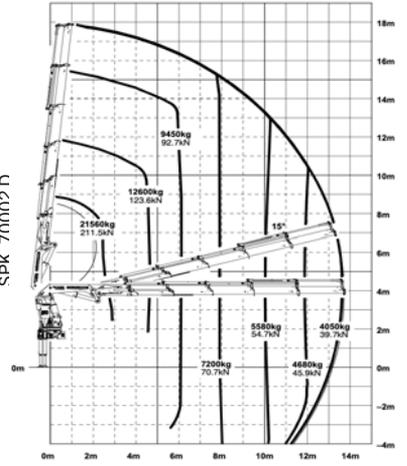


SPK 70002 E

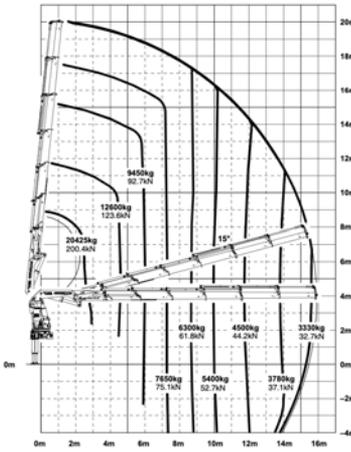

SPK 70002 F

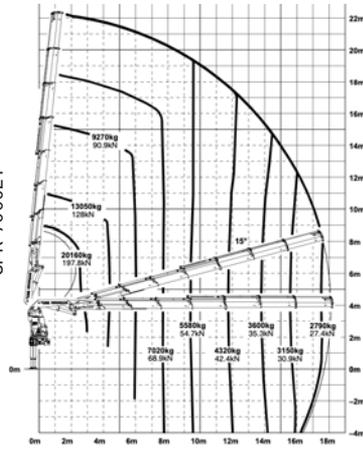


SPK 70002 G

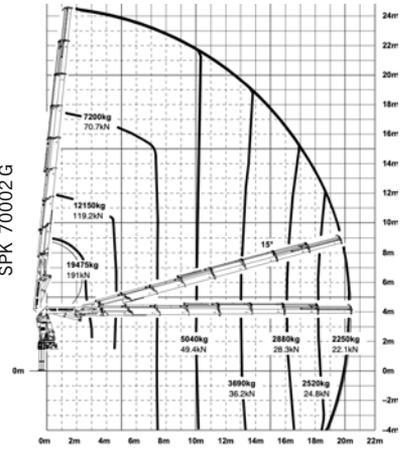

SPK 74002



LIFTING DIAGRAM

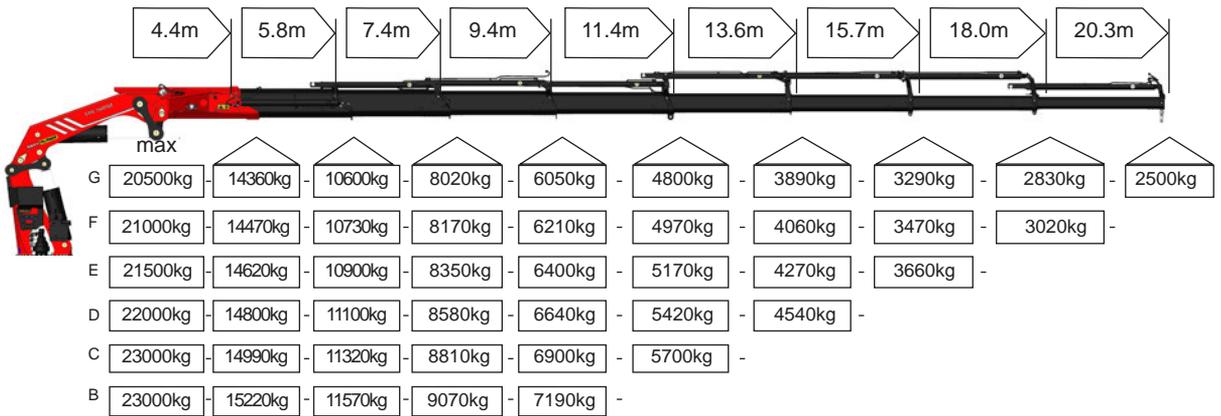


	SPK 74002 B	SPK 74002 C	SPK 74002 D
No. of Booms	3	4	5
Lifting Moment	70.1 mt	70.1 mt	70.1 mt
Lifting Capacity	23000 kg	23000 kg	22000 kg
Max. Outreach	9.5 m	11.5 m	13.7 m
Standard crane weight	6093 kg	6401 kg	6798 kg


	SPK 74002 E	SPK 74002 F	SPK 74002 G
No. of Booms	6	7	8
Lifting Moment	70.1 mt	70.1 mt	70.1 mt
Lifting Capacity	21500 kg	21000 kg	20500 kg
Max. Outreach	15.8 m	18.1 m	20.4 m
Standard crane weight	7091 kg	7314 kg	7514 kg

LIFTING CHART


SPK 74002 B

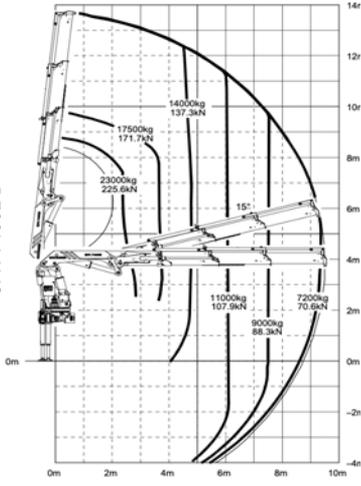


SPK 74002 C

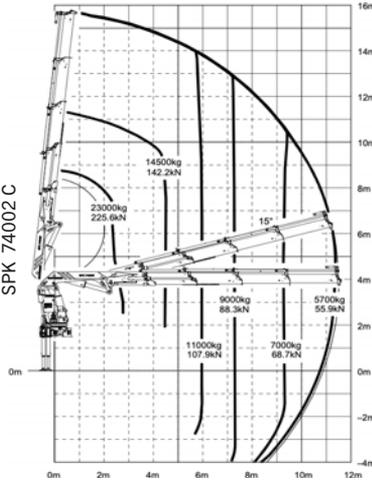


SPK 74002 D

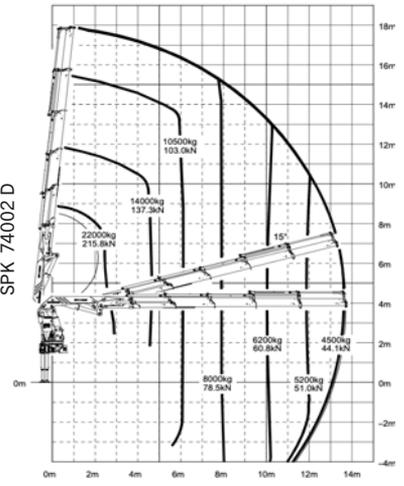


SPK 74002 E

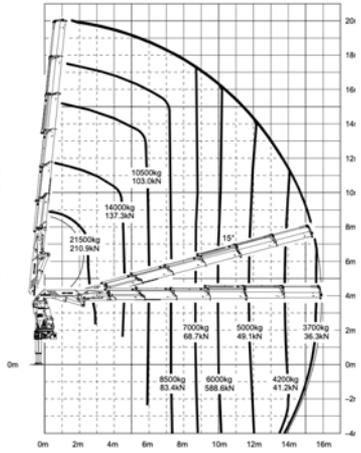

SPK 74002 F

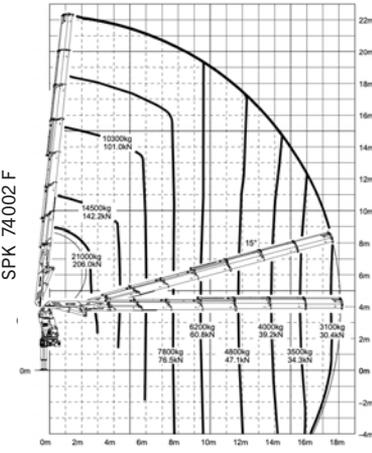

SPK 74002 G

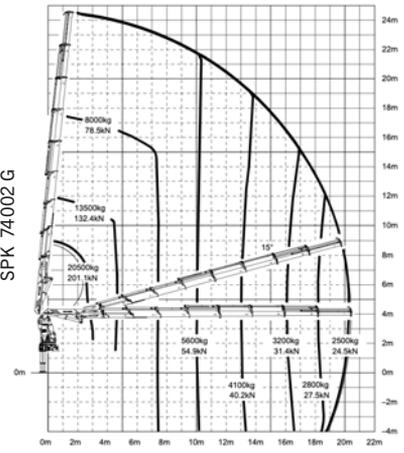

SANYPALFINGER SPV Equipment Co., Ltd
No. 189 Huanghe Road,
Economic Development Zone
Rudong, Jiangsu, China
T: +86 513 8069 8024 | T: +86 4008-835-318
www.sanypalfinger.com

Cranes shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.
2025-8 version